

Hasatek K8



Brief Introduction

Beta 2.5

A brief introduction to the K8: The Hasatek Standard Portable LED LCD Projector offers 420 ANSI lumens, a contrast ratio of 4000:1, and an HDTV resolution of 1920 x 1080. Thanks to the LEDs, the projector has a light source lifespan of up to 30,000 hours, which would equate to over 20.5 years based on 4 hours of daily use. Since Hasatek specifies the projector's brightness in lumens, we have calculated an approximate ANSI lumen value in this case. An image width of up to 208 cm is possible, as the projector has 420 ANSI lumens. However, if there is ambient light in the room, the image should be no wider than 139 cm. Furthermore, it is compatible with Full HD 1080p and 4K (compressed).

Display Type

- LCD TFT Panel
- HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

420 / 7000 Lumen

187 Lux (200 cm Screen width)

Contrast

4000:1

4000:1

Black Level

0,1050 min. Lumen

0,047 min. Lumen

Offset

-

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

UHD (4K2K) 3840 x 2160 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

Light Source

LED

Light Life

30000 h. LED-Lampe

Operating Costs

0,00 € LED

Focus

-

Zoom

-

Objective

-

Throw Ratio

-

Audio

-

Connections

-

Ceiling Mounting

-

Power


-

Size WxHxD

-

Operating Noise

-

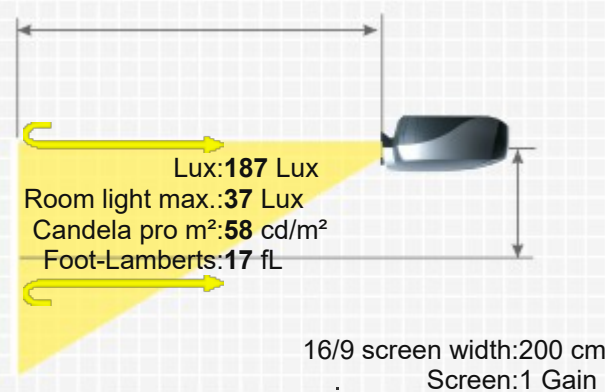

Weight

2,05 kg / 4,41 lbs.

Keystone

-

Illumination

-

Frequenz

-

Foot-Lamberts

17 fL / max. 208 cm screen width

58 cd/m²

■ Full HD 1080P compatible

■ PICO

■ Internet Ready

■ Built-in Internet

■ Lab coat pocket

■ Hi-Fi Stereo

Screen Mirroring

-

Status

2025 Current model // Last update of the data: 2026-03-31

Data



HCinema

<https://www.projector-database.com/pro/hasatekk8-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.