

Hitachi CP X3030WN



The Hitachi CP X3030WN standard portable LCD projector has 3200 Ansi lumens, a contrast of 4000:1 and an XGA 1024 x 768 resolution. The lamp life is specified by the manufacturer as 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. The projector is equipped with a microphone jack plug and 16W speakers, so no additional speakers are required for presentations or training courses. A screen width of up to 493 cm is possible. However, the picture should be smaller in room light. We recommend max. 329 cm. Even 1080P video signals are no problem for the projector. On the market since 2013, the model is no longer offered by the manufacturer Hitachi.

Brief Introduction Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

Projector

3200 / 2100 im Eco Mode

Screen

1067 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off

4000:1 full on/off

Black Level

0,8000 min. Lumen

0,267 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

215W UHP Lamp
Articel Nr.: DT01431

Light Life

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio


1,5-1,8:1

Audio

1 x 16W

Connections

HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in und out
RS232C Din 9 pin in
USB TYP A, B in
RJ45 in
Mikrofon in
Mini Jack Audio in

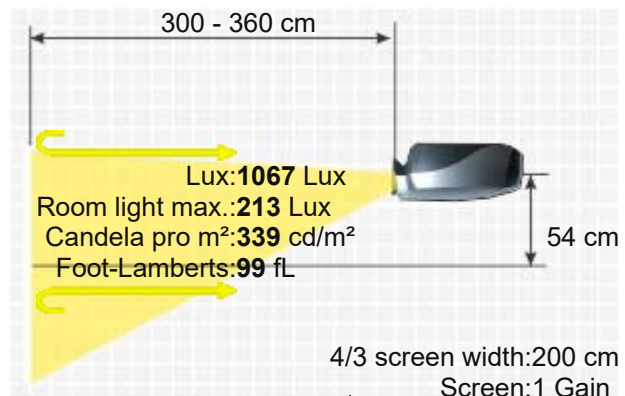



Ceiling Mounting	Yes
Power	310W
Size WxHxD	320 x 85 x 245 mm (12,6"x3,3"x9,6") 6,66 L/dm ³
Operating Noise	37 / 29 dB in Eco Mode