

Hitachi CP X605

HITACHI CP X605



Brief Introduction

Beta 2.5

The CP X605 LCD has 4000 Ansi-Lumen, a contrast of 1000:1 in theater mode and an XGA 1024 x 768 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 4000 Ansi lumens, an image width of 551 cm is possible. The projector will also cope with slightly brighter rooms with a smaller picture width (we recommend max. 367 cm). This model is no longer offered by Hitachi.

Display Type



3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

4000 / 3200 im Eco Mode
1000:1 full on/off im Theatre Mode
4,0000 min. Lumen
Vert.: +41% -0% Hori.: +/-10% manuell
XGA 1024 x 768

1333 Lux (200 cm Screen width)
1000:1 full on/off im Theatre Mode
1,337 min. Lumen

786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).

285W UHB Lamp
Article Nr.: DT00771
2000 h.

-

Manual


Manual 1,2

F=1,7-2,1 f=24,3-29,2 mm

1,5-1,8:1

4 x 4W

1 x DVI M1DA
2 x D-sub 15pin in 1 x out
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack in und out
RJ45

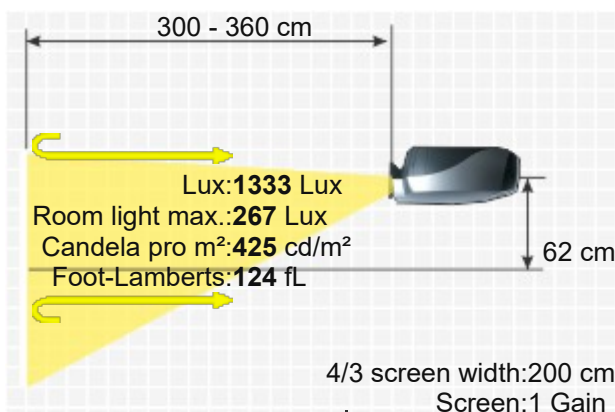



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
460W
420 x 139 x 319 mm (16,5"x5,5"x12,6") 18,62 L/dm³
39 / 33 dB in Eco Mode

Weight
Keystone
Illumination

7,00 kg / 15,43 lbs.
Vert.: +/-40°
Hori.: +/-20°
-

Frequenz

H-sync: 31,5-106 kHz
V-sync: 56-120 Hz


Foot-Lamberts

124 fL / max. 551 cm screen width
425 cd/m²

- Features
- Direkt Power Off
 - Lens shift Funktion manuell
 - Freeze
 - Blank (Black screen button)
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Dynamic iris
 - Password protection
 - Remote control with laser pointer und mouse control
 - Control via web browser
 - Lan network compatible.
 - Overscan adjustable
 - De-interlacer with 3:2 pull down..

Screen Mirroring

-

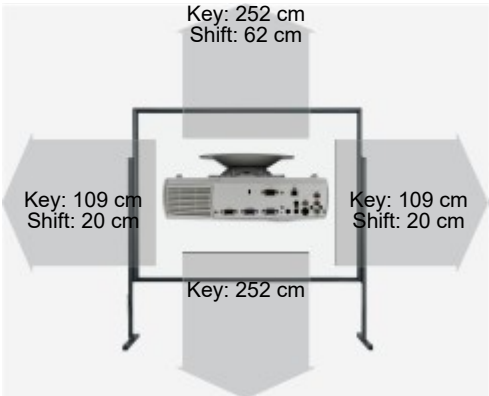

Optional accessories

	Nackte Lampe	NLMP5062	115,39 €
	Lampe Ruby	Ruby-LMP5062	165,95 €
	Lampe inkl. Luftfilter Original	DT00771	EOL €
	Kompatible Lampe	LMP-K16584	74,74 €
	Fernbedienung Original	HL02881- R016F / HL03032 - R017H / HL02483	25,29 €
	Luftfilter Original	MU03642	22,91 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
UL-604	4-7.48:1	800-1496 m	50%	+/-10%	Manual
LL-603	2.04-3.93:1	408-786 m	50%	+/-10%	Manual
SL-602	1.25-2.01:1	250-402 m	50%	+/-10%	Manual
FL-601	0.79:1	158 m	0.0% Fix	+/-10%	No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2026-06-09





Data



More Details

HCinema

<https://www.projector-database.com/pro/hitachicpx605-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.