

Hitachi LP-WU9750B

HITACHI LP-WU9750B



The stationary LP-WU9750B 3D Laser DLP has 8000 Ansi-Lumen, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. The lifespan of the laser is 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. The projector can illuminate an image width of up to 909 cm thanks to its 8000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 606 cm is recommended. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 3D are also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. The model was built by Hitachi in 2016 and is no longer current.



1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective


8000
20000:1 full on/off
0,4000 min. Lumen
Vert.: +60% -22% Hori.: +/-20%
WUXGA 1920 x 1200
2.304.000 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.
Laser
Articel Nr.: HL03141
20000 h.

0,00 € Laser

Powered

Powered 1,5

optional

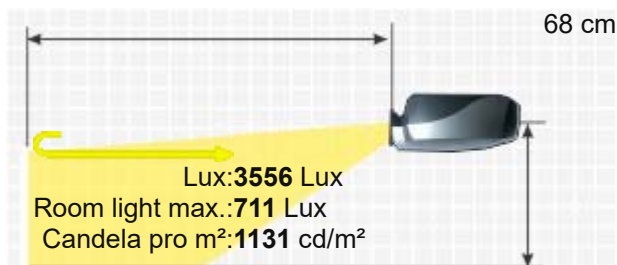

Throw Ratiooptional

Audio-

Foot-Lamberts:330 fL

16/9 screen width:200 cm

Screen:1 Gain

Connections

2 x HDMI in

DVI-D in

D-sub 15pin in und out

5 x BNC RGBHV in

USB in

RS232C Din 9 pin in

RJ45 in

HDBaseT in

3G-SDI in und out

12V Trigge rout



Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes

885 / 845W in Eco Mode

500,4 x 215,9 x 576,6 mm (19,7"x8,5"x22,7") 61,92 L/dm³

-

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

27,99 kg / 61,71 lbs.

Vert.: +/-60°

Hori.: +/-40°

-


H-sync: 15-106 kHz

V-sync: 50-120 Hz

Range max.: 150 MHz

330 fL / max. 909 cm screen width

1131 cd/m²

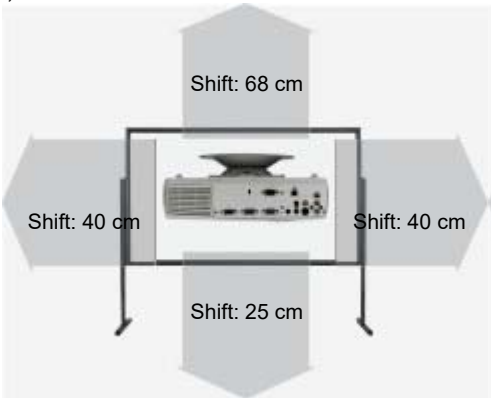

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Dynamic iris
 - Warping
 - 360° installable
 - 24/7 continuous operation capable
 - Edge Blending
 - Picture-in-Picture
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 - DICOM Simulation.

- Optional
- Object lens original
- Object lens original
- Object lens original
- Object lens original
- Object lens original
- Object lens original
- Remote control original
- USL-901
- UL-906
- SL-902
- SD-903X
- SD-903W
- LL-905
- HL03141

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc149>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
USL-901	0.76-0.95:1	1.5-1.9 m	60-22%	+/-20%	Powered
UL-906	5.53-8.79:1	11.1-17.6 m	60-22%	+/-20%	Powered
SL-902	1.14-1.72:1	2.3-3.4 m	60-22%	+/-20%	Powered
SD-903	1.61-2.44:1	3.2-4.9 m	60-22%	+/-20%	Powered
ML-904	2.38-3.64:1	4.8-7.3 m	60-22%	+/-20%	Powered

LL-905

3.47-5.63:1

6.9-11.3 m

60-22%

+/-20%

Powered

FL-920

0.32:1

0.6 m

0.00% Fix

No Zoom

Status

2016 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2016-03-22 14:44:44

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachilpwu9750b-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.