

InFocus IN5102

INFOCUS IN5102



The stationary IN5102 LCD has 4000 Ansi-Lumen, a contrast of 1000:1 and an XGA 1024 x 768 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. A picture width of up to 551 cm is possible, if the picture width is smaller (we recommend max. 367 cm), rooms with residual light are also no problem. Playing 1080P is also no problem for the projector. On the market since 2008, the model is no longer offered by the manufacturer InFocus.

Brief Introduction

Beta 2.5

Display Type



3 x 0,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

4000

1333 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

4,0000 min. Lumen

1,337 min. Lumen

Lens shift

Vert.: +40% -0% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275 / 220W UHB Lamp

Articel Nr.: SP-LAMP-038

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

5,18% / 0,17 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,74-2,06

Throw Ratio


1,5-1,8:1

Audio

2 x 4W Stereo

Connections

HDMI 1.3 in
D-sub 15 pin in und out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in
RJ45 in

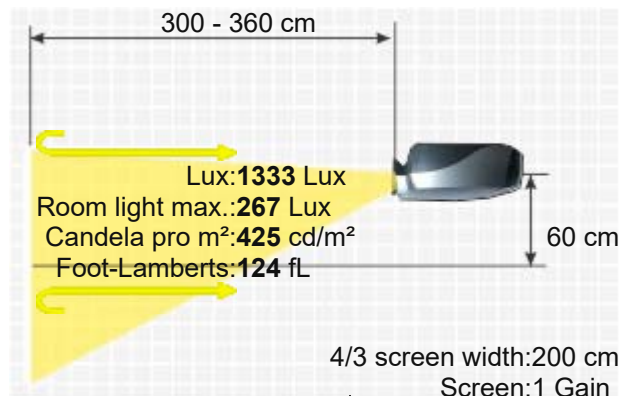



Ceiling Mounting Yes
 Power -
 Size WxHxD 420 x 129 x 314 mm (16,5"x5,1"x12,4") 17,01 L/dm³
 Operating Noise 32 / 30 dB in Eco Mode


Weight 7,10 kg / 15,65 lbs.
 Keystone Vert.: +/-40°
 Hori.: +/-20°
 Illumination -
 Frequenz H-sync: 15-91 kHz
 V-sync: 50-120 Hz
 Range max.: 140 MHz
 Foot-Lamberts 124 fL / max. 551 cm screen width
 425 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Freeze
 - Blank (Black screen button)
 - User logo
 - Eco Mode
 - Dynamic iris
 - Picture-in-Picture
 - Password protection
 - Remote control with laser pointer
 - Control via web browser
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - Overscan adjustable

Optional

Bulb only	NLMP18501
Lamp ruby	Ruby-LMP18501
Lamp original	SP-LAMP-038
Compatible lamp	LMP-K18501
Universal Remote original	Fernb-uni-V3
Remote control original	HW-NAVIGATOR-3
Air filter original	MU03642
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18501>

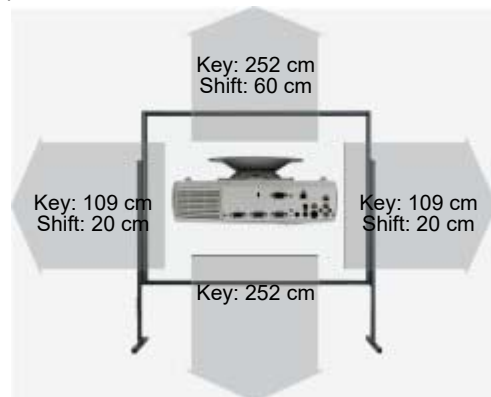

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Lens 040	3.9-7.4:1	7.8-14.8 m	50%		Manual
Lens 039	1.9-3.9:1	3.8-7.8 m	50%		Manual
Lens 038	1.2-2:1	2.4-4 m	50%		Manual
Fix Optional Lenses					
Lens 037	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2008 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data





HCinema

<https://www.projector-database.com/pro/infocusin5102-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.