

InFocus IN5104

INFOCUS IN5104



The InFocus model IN5104 is an LCD projector with WXGA 1280 x 800 resolution and a contrast ratio of 1000:1. The projector also offers a lens shift function, which makes image setup childs play. A picture width of up to 643 cm is possible; if the picture width is smaller (we recommend max. 429 cm), even rooms with residual light are no problem. Even 1080P video signals are no problem for the projector. The projector was launched in 2008 and is no longer sold by the manufacturer.



3 x 0,8" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector

4000

1000:1 full on/off

4,0000 min. Lumen

Screen

Vert.: +40% -0% Hori.: +/-10%

WXGA 1280 x 800

1.024.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

275 / 220W UHB Lamp

Article Nr.: SP-LAMP-046


2000 h. 3000 h. in Eco Mode

Screen

1600 Lux (bei 200 cm Screen)

1000:1 full on/off

1,604 min. Lumen

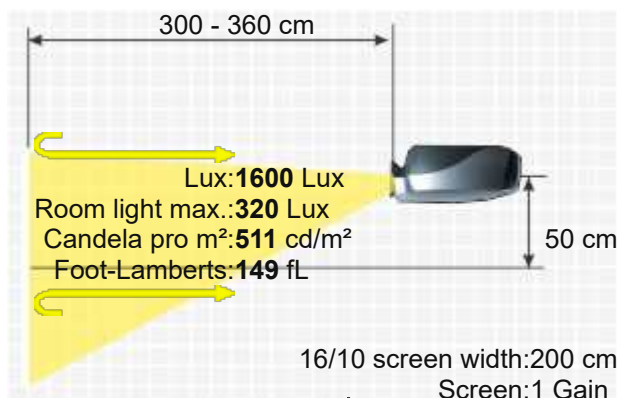

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Manual

Manual 1,2

F=1,74-2,06

1,5-1,8:1

2 x 4W Stereo

HDMI 1.3 in
D-sub 15 pin in und out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in
RJ45 in




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
-
420 x 129 x 314 mm (16,5"x5,1"x12,4") 17,01 L/dm³
32 / 30 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts
Features
Screen Mirroring

7,10 kg / 15,65 lbs.
Vert.: +/-40°
Hori.: +/-20°
-
H-sync: 15-91 kHz
V-sync: 50-120 Hz
Range max.: 140 MHz
149 fL / max. 643 cm screen width
511 cd/m²
 ■ Full HD 1080P compatible
 ■ Lens shift Funktion
 ■ Freeze
 ■ Blank (Black screen button)
 ■ User logo
 ■ Eco Mode
 ■ Dynamic iris
 ■ Picture-in-Picture
 ■ Password protection
 ■ Remote control with laser pointer
 ■ Control via web browser
 ■ Optional Wi-Fi network compatible.
 ■ Lan network compatible.
 ■ Overscan adjustable
 -

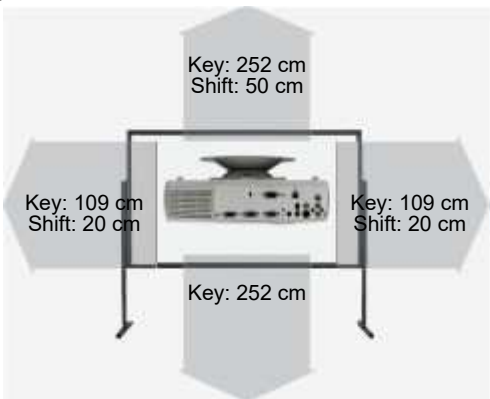

Optional accessories

	Nackte Lampe	NLMP18510	118,01 €
	Lampe Ruby	Ruby-LMP18510	141,23 €
	Lampe Original	SP-LAMP-046	240,42 €
	Kompatible Lampe	LMP-K18510	59,74 €
	Luftfilter Kompatibel	Alternative zu:MU05661 & MU03642 / 003-002119-01	25,29 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Luftfilter Original	MU05661 & MU03642 / 003-002119-01	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Lens 040	3.9-7.4:1	7.8-14.8 m	50%		Manual
Lens 039	1.9-3.9:1	3.8-7.8 m	50%		Manual
Lens 038	1.2-2:1	2.4-4 m	50%		Manual
Fix Optional Lenses					
Lens 037	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2008 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details

HCinema

<https://www.projector-database.com/pro/infocusin5104-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.