

InFocus IN5144

INFOCUS IN5144



The IN5144 LCD has 5500 Ansi-Lumen, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. The projector also offers an integrated media player for direct playback of files. Including a lens shift and keystone correction function, which provides freedom during installation. 5500 Ansi lumens ensure that a picture width of 753 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 502 cm. The model is also Full HD 1080P compatible. Even projection onto the ceiling is possible thanks to the 360° projection. The model built in 2012 is no longer offered by InFocus.

Brief Introduction

Beta 2.5

Display Type



3 x LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

5500 / 4400 im Eco Mode

3000:1 full on/off

1,8333 min. Lumen

Vert.: +50% -11,1% Hori.: +/-10%

WXGA 1280 x 800

1.024.000 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: JPEG (.jpeg, .jpg) Bitmap (.bmp) PNG (.png) GIF (.gif) Movie (.avi, .mov)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

330 / 264W im Eco Mode Lamp

Articel Nr.: SP-LAMP-081

2500 h. 3000 h. in Eco Mode

4,27% / 0,14 €

Powered

Powered 2

F=1,6-2,9 f=24-48 mm

1,5-3,0:1

2 x 8W


2 x HDMI 1.4 in
D-sub 15 pin in und out
5 x BNC RGBHV in
YUV in
S-Video in

2200 Lux (bei 200 cm Screen)

3000:1 full on/off

0,734 min. Lumen

Screen

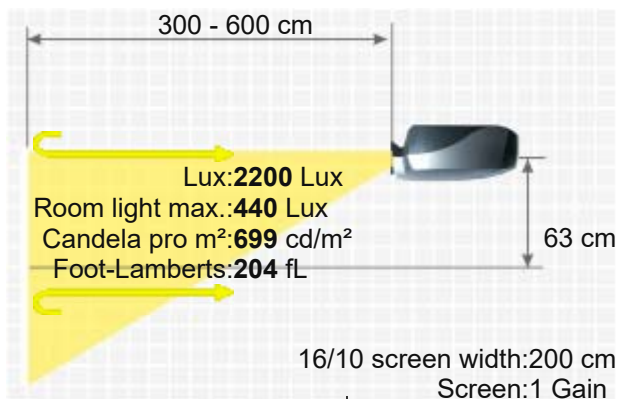

Cinch Video in
 USB Typ A, B in
 Mini Jack Audio in und out
 RJ45 in
 RS232C
 Ceiling Mounting Yes
 Power 480W
 Size WxHxD 498 x 147 x 476 mm (19,6"x5,8"x18,7") 34,85 L/dm³
 Operating Noise 37 / 31 dB in Eco Mode

Weight 8,40 kg / 17,64 lbs.
 Keystone Vert.: +/-35°
 Hori.: +/-35°
 Illumination -

Frequenz H-sync: 31,5-106 kHz
 V-sync: 56-120 Hz

Foot-Lamberts 204 fL / max. 753 cm screen width
 699 cd/m²
 ■ Full HD 1080P compatible
 ■ Lens shift Funktion
 ■ Integrated Mediaplayer
 ■ Eco Mode
 ■ Kensington Slot
 ■ Dynamic iris

Features
 ■ 360° installable
 ■ 24/7 continuous operation capable
 ■ Password protection
 ■ PJLink™
 ■ Lan network compatible.
 ■ Crestron®-Software compatible.
 ■ DICOM Mode

Lamp original SP-LAMP-081
 Object lens original LENS-073
 Object lens original LENS-072
 Object lens original LENS-071
 Object lens original LENS-070
 Object lens original LENS-069
 Remote control original INFOCUS-IN5132

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21005>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LENS-073	4.9-8.3:1	9.8-16.6 m	50%	+/-10%	Powered
LENS-072	2.8-4.9:1	5.6-9.8 m	50%	+/-10%	Powered
LENS-071	1.5-3:1	3-6 m	50-11.1%	+/-10%	Powered
LENS-070	1.5-2.2:1	3-4.4 m	50%	+/-10%	Powered
Fix Optional Lenses					
LENS-069	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-30





HCinema

<https://www.projector-database.com/pro/infocusin5144-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.