

InFocus IN5542

INFOCUS IN5542



The InFocus IN5542 stationary LCD projector has 7500 Ansi lumens, a contrast of 2500:1 and an XGA 1024 x 768 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 754 cm is possible as the projector has 7500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 503 cm. It is also Full HD 1080P compatible. On the market since 2012, the model is no longer offered by the manufacturer InFocus.



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

7500
2500:1 full on/off
3,0000 min. Lumen
Vert.: +/-87% Hori.: +/-58%
XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.
350W UHB Lamp
Articel Nr.: SP-LAMP-079
2000 h. 3000 h. in eco Mode

Screen

2500 Lux (bei 200 cm Screen)
2500:1 full on/off
1,001 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Powered

Powered

optional

optional

-

HDMI in
DVI-D in
2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Cinch Video in
RJ45 in
RS232C

Yes



Power 540W
Size WxHxD 476 x 272 x 469 mm (18,7"x10,7"x18,5") 60,72 L/dm³
Operating Noise 42 / 34 dB in Eco Mode

Weight 13,20 kg / 29,1 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°

Illumination -

Frequenz -

Foot-Lamberts 232 fL / max. 754 cm screen width
795 cd/m²


- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
-

Features

Optional

Lamp original SP-LAMP-079
High performance air filter original MU06351 / 003-002722-01 / SP-FILTER-01
Object lens original LENS-068
Object lens original LENS-065
Object lens original LENS-063
Remote control original HL02198

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=20912>

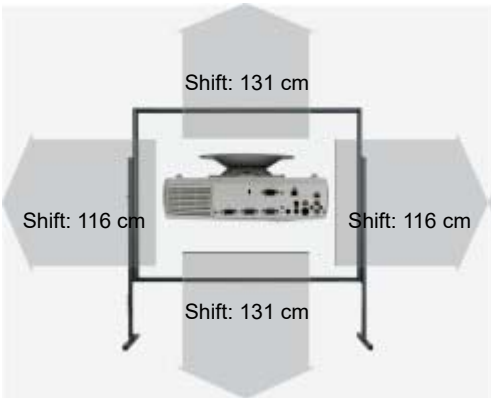

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LENS-068	2.2-2.9:1	4.4-5.8 m	+/-87%	+/-58%	Powered
LENS-067	0.5-0.6:1	1-1.2 m	0.0% Fix		No Zoom
LENS-066	1.2-1.5:1	2.4-3 m	+/-87%	+/-58%	Powered
LENS-065	1.5-2.2:1	3-4.4 m	+/-87%	+/-58%	Powered
LENS-064	2.8-5.2:1	5.6-10.4 m	+/-87%	+/-58%	Powered
LENS-063	5-9.2:1	10-18.4 m	+/-87%	+/-58%	Powered
LENS-062	1.8-2.3:1	3.6-4.6 m	50%	+/-58%	Powered

Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/infocusin5542-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.