

Kodak DP 800



KODAK DP 800



Brief Introduction

Beta 2.5

Display Type



1 x 0,9" Chip DLP
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

500

162 Lux (bei 203 cm Screen)

Contrast

150:1 full on/off

150:1 full on/off

Black Level

3,3333 min. Lumen

1.102 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC, PAL, NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

Light Source

270W Metalldampf Lamp

Articel Nr.: 2E5615 1447697

Light Life

1000 h.

Operating Costs

-

Focus

Manual

Zoom

-

Objective

-

Throw Ratio

-

Audio

2 x 6W

Connections

D-sub 15 pin in

Cinch Video in

S Video Eingang

Ceiling Mounting

Nein

Power

450W

Size WxHxD

320 x 200 x 310 mm (12,6"x7,9"x12,2") 19,84 L/dm³

Operating Noise

-

Weight

-

Keystone

-

Illumination

-

Frequenz

H-sync: 15,0-50,0 kHz

V-sync: 50-90 Hz

Foot-Lamberts


15 fL / max. 195 cm screen width

51 cd/m²

Features

■ Freeze

■ Remote control with mouse control

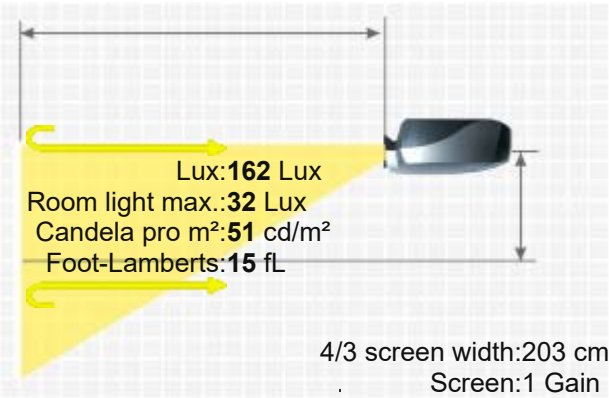

More Details



HCinema

<https://www.projector-database.com/pro/kodakdp800-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.