


Kodak kp 1300x

KODAK KP 1300X



Display Type	3 x LCD TFT 1,3 Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	1300
Contrast	-
Black Level	-
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	SXGA 1280 x 1024 compressed NTSC, PAL, SECAM Pal 60 NTSC 4,43
Application	Stationary Permanent installation in the training room and meeting room as well as the conference room. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W Metall Hallogen Lamp Articel Nr.: KP1300X
Light Life	2000 h.
Operating Costs	10,06% / 0,33 €
Focus	-
Zoom	Powered 1,3
Objective	-
Throw Ratio	-
Audio	-
Connections	Cinch Video in Stereo Eingang 2 x D-sub 15pin in VGA Ausgang, S Video Eingang RS232C Controuler, YUV Eingang
Ceiling Mounting	Yes
Power	200W
Size WxHxD	155 x 270 x 400 mm (6,1"x10,6"x15,7") 16,74 L/dm³
Operating Noise	45dB

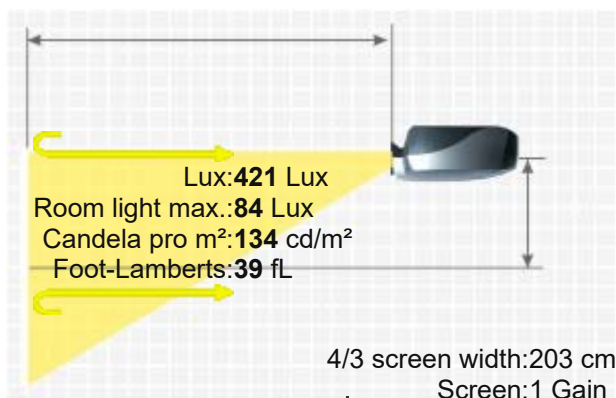

Weight	7,00 kg / 15,43 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	39 fL / max. 314 cm screen width 134 cd/m²
Features	-
In Test	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/kodakkp1300x-en.html>