

Liesegang dv • 3500 vario+

LIESEGGANG DV • 3500 VARIO+



A brief introduction to the dv i $\frac{1}{2}$ 3500 vario+: The Liesegang LCD projector offers 3500 Ansi lumens, a contrast of 800:1 and an SXGA+ 1400 x 1050 resolution. The projector also offers a lens shift function that makes image adjustment childs play. An image width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. It came onto the market in 2005 and is no longer offered by the manufacturer Liesegang.



3 x 1,4" LCD TFT Panel mit MLA

SXGA 4/3 Liquid Crystal Display with Micro Lense Array

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

3500

800:1 full on/off

4,3750 min. Lumen

Vert.: +60% --15% motorisch

SXGA+ 1400 x 1050

1.470.000 Pixel

UXGA 1600 x 1200 compressed

NTSC, PAL, SECAM, NTSC 4.43, 1080i, 720p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

2 x 200W UHP Lamp

Article Nr.: LMP17718

3000 h. 6000 h. in singel lamp Mode

-

Powered

Powered

optional

optional

nein

5 x BNC RGBHV in

Composite Video,

S-Video,

YUV in,

1x VGA (D15-Buchse)

1x DVI (Digital Visual Interface)

1x D9-Buchse für RS232C ein/aus


Yes, is possible.

1167 Lux (bei 200 cm Screen)

800:1 full on/off

1,464 min. Lumen

Screen

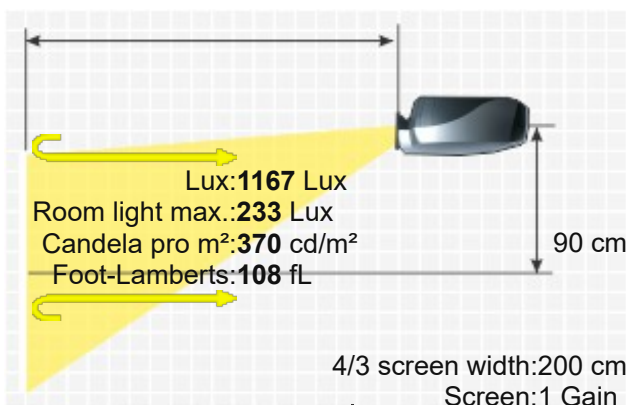


Power 520W
Size WxHxD 415 x 195 x 590 mm (16,3"x7,7"x23,2") 47,75 L/dm³
Operating Noise 37dB

Weight 20,00 kg / 44,09 lbs.
Keystone -
Illumination 95%
H-sync: 15-110 kHz
V-sync: 25-150 Hz
Frequenz Range max.: 160 MHz
Foot-Lamberts 108 fL / max. 515 cm screen width
370 cd/m²
Features

- Lens shift Funktion motorisch
- Freeze
- User logo
- Picture-in-Picture
- Remote control with backlight
- Single lamp mode
- Smooth picture transition
- 4 x digital zoom,

Screen Mirroring -

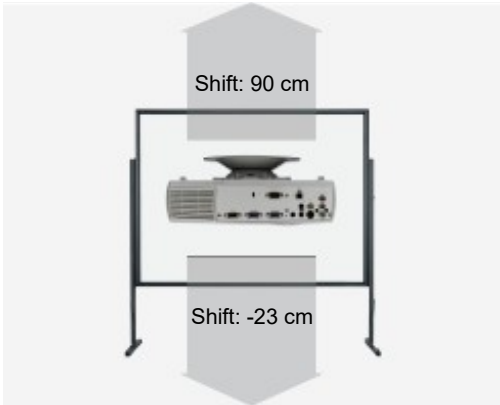

Optional accessories

	Deckenhalterung Länge 225 mm	Halterung45	85,80 €
	Luftfilter universal	uni3mm	18,15 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Liesegang 7:1	6.36-6.36:1	12.7-12.7 m	57-13%		Powered
Liesegang 3.0-6.0:1	2.81-5.62:1	5.6-11.2 m	57-13%		Powered
Liesegang 1.9-2.6:1	1.73-2.37:1	3.5-4.7 m	57-13%		Powered
Liesegang 1.3-1.8:1	1.23-1.6:1	2.5-3.2 m	57-13%		Powered
Fix Optional Lenses					
Liesegang 0.85:1	0.79:1	1.6 m	0.0% Fix		No Zoom

Status 2005 Discontinued (EOL) // Last update of the data: 2025-03-03



More Details



HCinema
<https://www.projector-database.com/pro/liesegangdv3500varioplus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.