

Liesegang dv 560 flex

LIESEGANG DV 560 FLEX



The stationary dv 560 flex LCD has 4500 Ansi-Lumen, a contrast of 750:1 and an XGA 1024 x 768 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 584 cm is possible, if the image width is smaller (we recommend max. 389 cm), rooms with residual light are also no problem. It was launched in 2004 and is no longer offered by the manufacturer Liesegang.



3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4500 / 3600 im Eco Mode

750:1 full on/off

6,0000 min. Lumen

Vert.: +50% -0% motorisch

XGA 1024 x 768

786.432 Pixel

UXGA 1600x1200 compressed

Pal, Secam, NTSC

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

310W UHP Lamp

Articel Nr.: ZU0212 04 4010

2000 h.

Screen

1456 Lux (bei 203 cm Screen)

750:1 full on/off

1.949 min. Lumen

-

Powered


Powered 1,48

F=1,7-2,4 f=31-46 mm

1,5-2,2:1

2 x 1W

DVI M1 DA in
D-sub 15p in und out
5 x BNC RGBHV in
Cinch Stereo in
Cinch Video in
S-Video in
Mini Jack in
RS232C

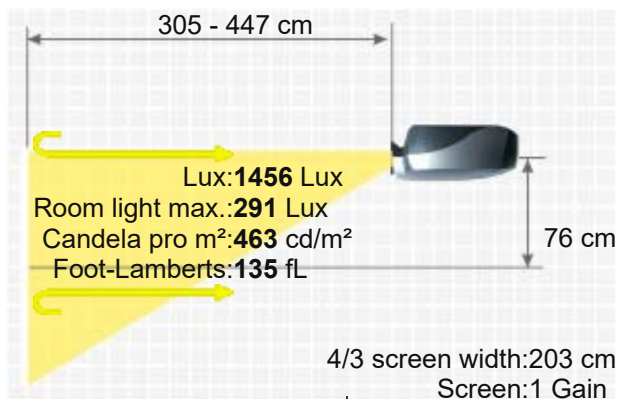

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

RJ45




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
470W standby 10W
420 x 160 x 320 mm (16,5"x6,3"x12,6") 21,5 L/dm³
39 / 34 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

7,70 kg / 16,98 lbs.
Vert.: +/-15°
Hori.: +/-5°
80%
H-sync: 15,6-91,2 kHz
V-sync: 50-120 Hz
Range max.: 135 MHz
135 fL / max. 584 cm screen width
463 cd/m²

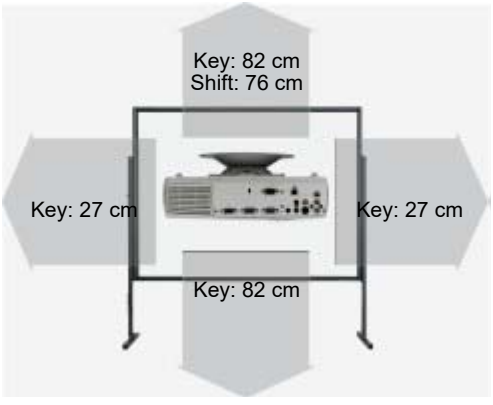

Features

- Lens shift Funktion motorisch
- Freeze
- Blank (Black screen button)
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Picture-in-Picture
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Digital Zoom
- Pin Code Security System
- De-interlacer

Optional

Lamp ruby	Ruby-LMP2168
Lamp incl. air filter original	ZU0212 04 4010
Compatible lamp	LMP-K2161
Remote control original	HL02003
Air filter original	NJ08081
Ceiling Mount 100-120	Halterung100
Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2161	

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Liesegang OBJV 80-144	3.96-7.26:1	8-14.7 m	50%		Powered
Liesegang OBJV 46-82	2.25-4.13:1	4.6-8.4 m	50%		Powered
Liesegang OBJV 23-31	1.12-1.51:1	2.3-3.1 m	50%		Powered

Fix Optional Lenses

Liesegang OBJV 16	0.79:1	1.6 m	0.0% Fix		No Zoom
-------------------	--------	-------	----------	--	---------

Status 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/lieseangdv560flex-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.