

Lite-On FP510D



LITE-ON FP510D



Brief Introduction

Beta 2.5

The standard portable Lite-On FP510D DLP projector has 1300 Ansi lumens, a contrast of 1500:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 314 cm well. However, if room light is available, the picture width should ideally not exceed 209 cm. It is no longer offered by the manufacturer Lite-On.



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1300 / 1600 Lumen

421 Lux (bei 203 cm Screen)

Contrast

1500:1 full on/off

1500:1 full on/off

Black Level

0,8667 min. Lumen

0.281 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC / PAL / SECAM(M), 480i ,480p, HDTV (720p/1080i)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

250W VIP Lamp

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

2 x 2W Stereo

Connections

D-sub 15pin in und out

DVI in

USB in

S-Video in

Cinch Video in

Mini Jack in und out

Ceiling Mounting

Yes

Power

380W

Size WxHxD

330 x 104 x 276 mm (13"x4,1"x10,9") 9,47 L/dm³

Operating Noise

34dB

Weight

3,40 kg / 7,5 lbs.

Keystone

-

Illumination

80%

Frequenz


H-sync: 31,5-80 kHz

V-sync: 56-85 Hz

Foot-Lamberts

39 fL / max. 314 cm screen width

134 cd/m²

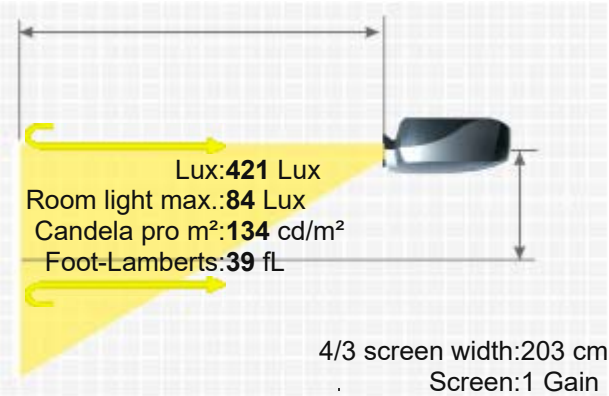

Features

- Freeze
- Remote control with laser pointer

Status
Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/liteonfp510d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.