




D625 • D628 Series

DLP™ Digital Multimedia Projector

Easy lamp replacement design when ceiling mounted.

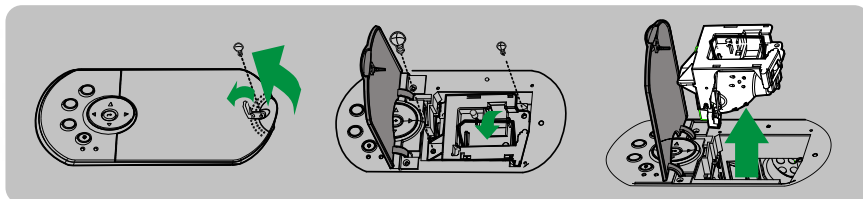

LCEP

LUXEONUSA COLOR ESSENTIAL PROCESSING

LUXEONUSA picture-enhancing technology, which enhances the screen image via unique techniques and algorithms, for enhanced brightness, contrast, tint, color and clarity. This technology ensures every LUXEONUSA displays to contain a True Color enhancement, which reproduces stunning, lifelike colors close to those displayed by the Trinitron technology.

- >> Crystal clear image quality driven by superb performance
- >> Extra high brightness for middle and large rooms
- >> Progressive scan delivers smoother video pictures
- >> Digital keystone correction relieves distorted projection pictures
- >> Auto-detect input signals
- >> No-delay image projection when inter-switching between input signals
- >> Eco-mode projection provides energy saving, more noise reduction, and longer lamp life
- >> Smart cooling system for energy saving
- >> Durable workhorse projector

D625D628Series


For Middle or Large



Key Pad

Specification


Model Name	D628PX	D625MX	D628PS	D625MS
Technology	0.7" TI DMD x1, 12°DDR DLP with DDP 2000		0.55" TI DMD x1, 12°DDR DLP with DDP 2000	
Resolution	XGA 1024x768 Native		SVGA 800x600 Native	
Contrast Ratio	2000:1	2000:1	1800:1	1800:1
Brightness	2800 Lumens	2500 Lumens	2500 Lumens	2100 Lumens
Uniformity	80%			
Zoom Ratio	1.20 : 1			
Throw Ratio	1.64 - 1.97			
Aspect Ratio	4:3 & 16:9			
Keystone Correction	Vertical +/- 15°			
H-Sync	15/31~90KHz		15/31- 70KHz	
V-Sync	50 - 85 Hz		50 - 85 Hz	
Data Compatibility	IBM PC or Compatible (VGA, SVGA, XGA, SXGA)			
Video Compatibility	SDTV, EDTV, HDTV. NTSC/PAL.			
Dimension	10.76" x 7.81" x 2.89" (328mm x 238mm x 88mm) WxDxH			
Weight	6.5 lbs (2.9Kg)			
OSD Language	English, French, Germany, Spanish, Italian, Swedish, Japanese Simplified Chinese, Tradition Chinese, Korean			
Input Terminal	DVI-I in, RGB in, RCA in, S-Video in, RGB out, Component in, Audio(mini jack in), Audio(RCA*2 in), RS-232 in, USB out			
Output Terminal	RGB out, USB out			
Build-in Speaker	2W mono speaker			
Security Lock	Kensington Lock			
Special Feature	Data and Audio loop-through, ECO mode			

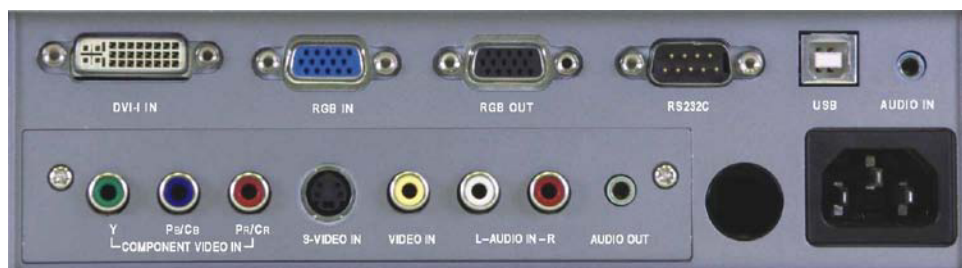

Input/Output Terminals



Projector Distance and Diagonal Screen Size

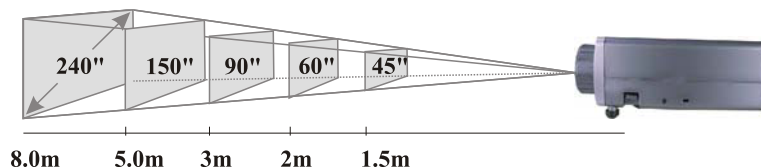

All our products are developed with certain aspects in mind, such as low-lead designs, certified electromagnetic emissions, zero radiation, low energy consumption and the lengthening of product life to prevent parts waste.



Wintory Co.,Ltd
6/330-1 Bangna-Trad Rd.,
Dokmal, Praveh, Bangkok 10250 Thailand
Tel (66)0-2316-9365(Auto) Fax (66)0-2316-9364
Website: <http://www.wintory.com> E-mail: info@wintory.com