

Microtek VS1



MICROTEK VS1

Brief Introduction Beta 2.5	A brief introduction to the Microtek VS1. The standard portable LCD projector has an SVGA 800 x 600 resolution and a contrast of 250:1. The projector can illuminate a picture width of 289 cm well. However, if room light is available, the image width should ideally not exceed 193 cm. It is no longer offered by the manufacturer Microtek.		
Display Type	3 x 0,9" LCD TFT Panel SVGA 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector: 1100	Screen: 356 Lux (bei 203 cm Screen)	
Contrast	Projector: 250:1 full on/off	Screen: 250:1 full on/off	
Black Level	Projector: 4,4000 min. Lumen	Screen: 1.442 min. Lumen	
Offset	-		
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed		
Video Modes	NTSC, PAL, SECAM		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.		
Light Source	130W UHP Lamp		
Light Life	2000 h.		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,3		
Objective	F=1,7-2,1 f=37,0-48,0 mm		
Throw Ratio	2,02-2,62:1		
Audio	1 x 3W		
Connections	D-sub 15pin in und out RS232C S-Video in Cinch Video in Mini Jack in unnd out		
Ceiling Mounting	-		
Power	180W / 20W standby		
Size WxHxD	325 x 92 x 250 mm (12,8"x3,6"x9,8") 7,48 L/dm³		
Operating Noise	40dB		
Weight	3,28 kg / 7,23 lbs.		
Keystone	Vert.: +/-15°		
Illumination	-		
Frequenz	H-sync: 30-90 kHz V-sync: 56-85 Hz		
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²		
Features	Freeze		

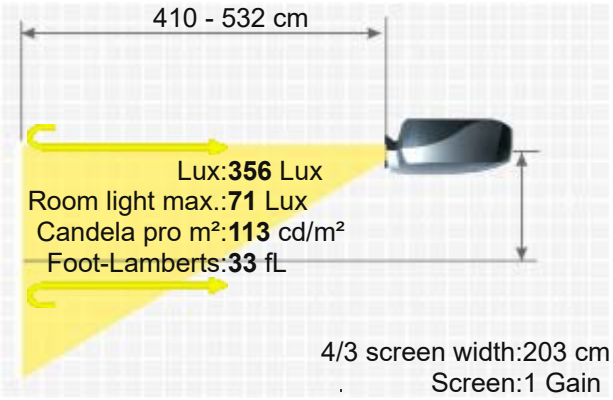

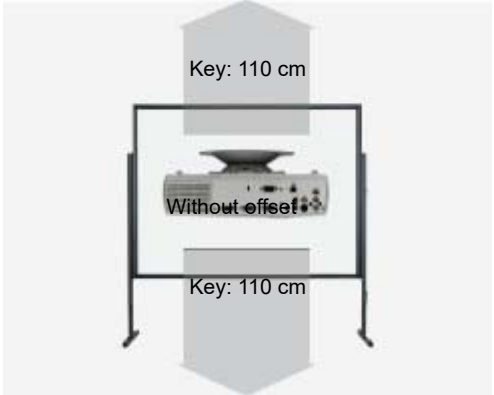

Status - Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema
https://www.projector-database.com/pro/microtekvs1-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.