

# Nec NC1600C



NEC NC1600C



## Brief Introduction

Beta 2.5

The E-Cinema NC1600C DLP has 17000 Ansi lumens, a contrast of 2200:1 and an HD2K 2048 x 1080 resolution. Thanks to the brightness of 17000 Ansi lumens, an image width of 1325 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 883 cm). This model is no longer offered by Nec, but is still very popular in our projector database.



3 x 0,98" 12 Grad DLP Chip  
HD2K 4/3 Ti Digital Light Processing Chip

## Display Type

### Ansi-Lumen

17000

5500 Lux (bei 203 cm Screen)

### Contrast

2200:1 full on/off

2200:1 full on/off

### Black Level

7,7273 min. Lumen

2.504 min. Lumen

### Offset

### Resolution

HD2K 2048 x 1080  
2.211.840 Pixel

### Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

### Application

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.  
Very large screen width and rooms with plenty of light and shaded daylight.

### Light Source

4 kW Lamp  
Articel Nr.: NC16LP401

### Light Life

-

### Operating Costs

-

### Focus

Powered

### Zoom

Powered

### Objective

optional

### Throw Ratio

optional

### Audio

-

### Connections

-

### Ceiling Mounting

Yes

### Power


5500W

### Size WxHxD

700 x 503 x 990 mm (27,6"x19,8"x39") 348,58 L/dm<sup>3</sup>

### Operating Noise

63dB

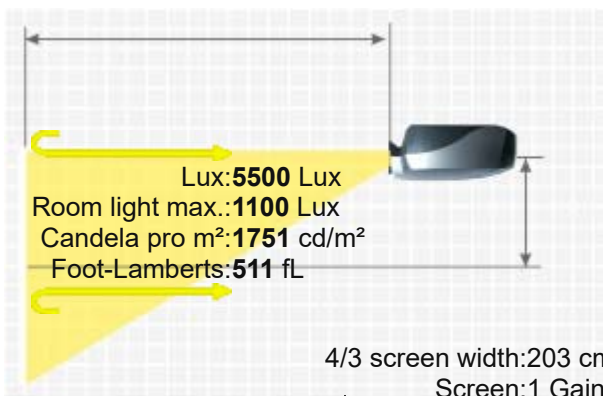

### Weight

99,00 kg / 218,26 lbs.

### Keystone

-

### Illumination

-

### Frequenz

-

### Foot-Lamberts

511 fL / max. 1135 cm screen width  
1751 cd/m²

### Features

■ Password protection

## Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					

2.40-3.90	2.4-3.9:1	4.9-7.9 m	Powered
1.75-2.40	1.75-2.4:1	3.6-4.9 m	Powered
1.3-1.75	1.3-1.75:1	2.6-3.6 m	Powered

Status Data 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/necnc1600c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.