

Nec PA521U

NEC PA521U



A brief introduction to the Nec PA521U. The stationary LCD projector has a WUXGA 1920 x 1200 resolution and a contrast of 6000:1. The projector can be positioned very freely using the lens shift function. The projector can illuminate a screen width of up to 733 cm thanks to its 5200 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 489 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It is also Full HD 1080P and 3D compatible, and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. It was launched in 2014 and is no longer offered by the manufacturer Nec.



3 x 0,76" LCD TFT Panel mit MLA

WUXGA 16/9 Liquid Crystal Display with Micro Lense Array

Projector	5200	2311 Lux (bei 200 cm Screen)
Contrast	6000:1 full on/off	6000:1 full on/off
Black Level	0,8667 min. Lumen	0,385 min. Lumen

Vert.: +50% -10% Hori.: +/-30%

WUXGA 1920 x 1200

2.304.000 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

350 / 264W im Eco Mode Lamp

Articel Nr.: NP26LP

3000 h. 4000 h. in Eco Mode

3,35% / 0,11 €


Manual

Manual

optional

optional

1 x 10W

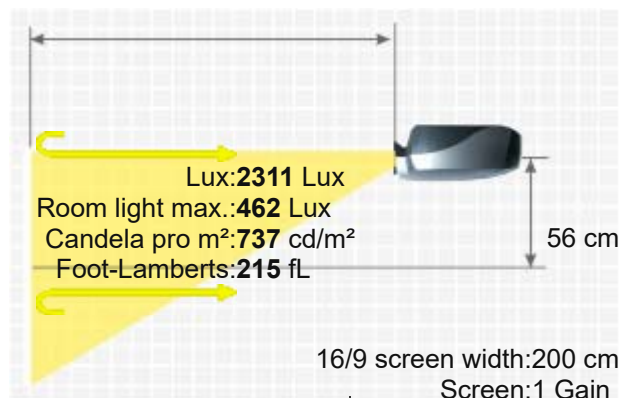

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

16/9 screen width: 200 cm
Screen: 1 Gain

Connections

2 x HDMI in 1 x out
D-sub 15 pin in
5 x BNC RGBHV in
USB Typ A in
RS232C Din 9 pin in
Mini Jack Audio in und out
RJ45 mit HDBaseT in

Ceiling Mounting

Yes

Power

460 / 362W in Eco Mode

Size WxHxD

499 x 144 x 359 mm (19,6"x5,7"x14,1") 25,8 L/dm³

Operating Noise

39 / 33 dB in Eco Mode

Weight

8,40 kg / 18,52 lbs.

Keystone

Vert.: +/-40°
Hori.: +/-40°

Illumination

-

Frequenz

H-sync: 15-100 kHz
V-sync: 48-120 Hz

Foot-Lamberts

215 fL / max. 733 cm screen width
737 cd/m²

- Features

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Direkt Power Off

■ Lens shift Funktion

■ Freeze

■ Blackboard Modus

■ User logo

■ Eco Mode

■ Warping

■ 360° installable

■ Edge Blending

■ Password protection

■ PJLink™

■ Lan network compatible.

■ Crestron®-Software compatible.

■ DICOM Simulation

■ 4K Interface

■ Picture-in-Picture

Object lens original	NP30ZL / 100013349
Lamp incl. air filter original	NP26LP / 100013748
Object lens original	NP15ZL / 60003219
Object lens original	NP14ZL / 60003221
Object lens original	NP13ZL / 60003217
Object lens original	NP12ZL / 60003220
Object lens original	NP11FL / 60003222
Remote control original	7N901081 / RD-466E
Air filter original	24J39531 & 24J39541

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc105>


Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP30ZL	0.79-1.04:1	1.6-2.1 m			
NP15ZL	4.7-7.02:1	9.4-14 m	50-10%	+/-30%	Manual
NP14ZL	2.97-4.79:1	5.9-9.6 m	50-10%	+/-30%	Manual
NP13ZL	1.5-3.02:1	3-6 m	50-10%	+/-30%	Manual
NP12ZL	1.19-1.56:1	2.4-3.1 m	50-10%	+/-30%	Manual
Fix Optional Lenses					
NP11FL	0.8:1	1.6 m	0.0% Fix		No Zoom

Status

2014 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

Created: 2014-07-29 10:44:24

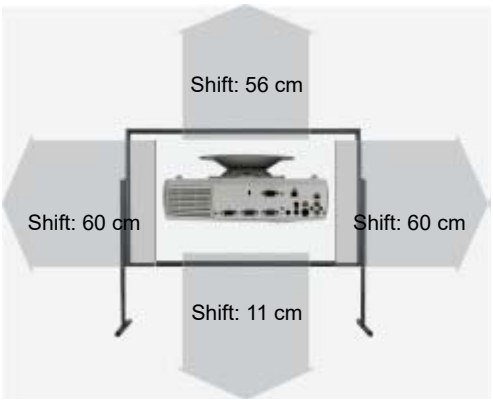



HCinema

<https://www.projector-database.com/pro/necpa521u-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.