

Optoma EzPro / EP728

OPTOMA EZPRO / EP728



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600

867 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,1818 min. Lumen

0,395 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

-

Light Life

Articel Nr.: SP.89M01GC01 / BL-FP200F

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,79-23,99 mm

Throw Ratio

1,95-2,15:1

Audio

1W Mono

Connections

DVI-I in

D-sub 15 pin in und out

S-Video in

Cinch Video in

USB Maus Port

RS232C

Ceiling Mounting

Yes

Power


280W / 10W standby

Size WxHxD

259 x 71,5 x 188 mm (10,2"x2,8"x7,4") 3,46 L/dm³

Operating Noise

33 / 31 dB in Eco Mode

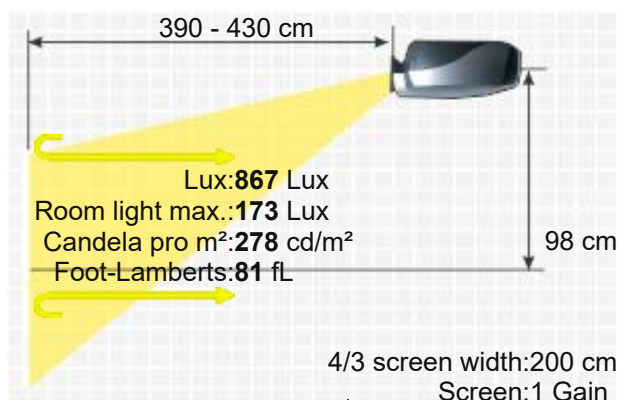

Key: 225 cm

Weight

2,00 kg / 4,41 lbs.

Keystone

Vert.: +/-18°

Illumination

85%

Frequenz

H-sync: 15-100 kHz

V-sync: 43-80 Hz

Foot-Lamberts

81 fL / max. 444 cm screen width

278 cd/m²

- Features

■ Freeze

■ Eco Mode

■ Kensington Slot

■ sRGB

■ Digital image shift

■ Password protection

■ BrilliantColor™

■ Remote control with laser pointer und mouse control

■ Overscan adjustable

	Bulb only Osram	NLMP16654
	Lamp ruby	Ruby-LMP16654
	Lamp original	SP.89M01GC01 / BL-FP200F
Optional	Compatible lamp	LMP-K16654
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16656>

Data

2007 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/optomaep728-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.