

Optoma EzPro / EP770

OPTOMA EZPRO / EP770



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,5000 min. Lumen

0,501 min. Lumen

Offset

XGA 1024 x 768

Resolution

786.432 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

220W SHP Lamp

Articel Nr.: BL-FS220A /

SP.86S01GC01/SP.89S001.C01

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,15

Objective

F=2,4-2,65 f=28,04-35,59 mm

Throw Ratio

2,0-2,4:1

Audio

1 x 3W

Connections

DVI-D mit HDCP in

D-sub 15pin in und out

S-Video in

Cinch Video in

RS232C


Mini jack in



Ceiling Mounting Power

Yes

275W / 10W standby

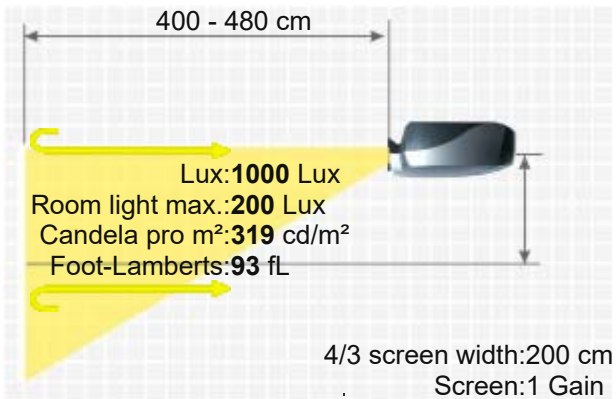

Size WxHxD 265 x 104 x 236 mm (10,4"x4,1"x9,3") 6,5 L/dm³
Operating Noise 33 / 28 dB in Eco Mode

Weight 2,40 kg / 5,29 lbs.
Keystone Vert.: +/-16°
Illumination 85%
Frequenz H-sync: 31,35-80 kHz
V-sync: 56-85 Hz
Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²
Features

- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Remote control with laser pointer
- RGBYW colour wheel.

Optional

- Osram bulb only NLMP17729
- Lamp ruby Ruby-LMP17729
- Lamp original BL-FS220A / SP.86S01GC01
- Compatible lamp LMP-K16349
- Universal Remote original Fernb-uni-V3
- Remote control original 45.80N01G101
- Ceiling Mount 100-120 Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16349>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/optomaep770-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

