

Optoma RS528

OPTOMA RS528



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable RS528 DLP has 2800 Ansi lumens, a contrast of 3000:1 and an SVGA 800 x 600 resolution. Due to the brightness of 2800 Ansi lumens, a picture width of 461 cm is possible. In room light, the picture should be max. 307 cm wide. The model was built by Optoma in 2011 and is no longer current.



1 x 0,55" DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

2800

3000:1 full on/off

0,9333 min. Lumen

Screen

933 Lux (bei 200 cm Screen)

3000:1 full on/off

0,311 min. Lumen

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

185W Lamp

Articel Nr.: BL-FU185A /

SP.8EH01GC01

3000 h. 4000 h. in Eco Mode

-

Manual

Manual 1,1

F=2,41-2,55 f=21,8-23,98 mm

1,95-2,15:1

1 x 2W

D-sub 15 pin in und out

S-Video in

Cinch Video in

RS232C

Mini Jack Audio in und out



Yes

-


286 x 97 x 192 mm (11,3"x3,8"x7,6") 5,33 L/dm³

29 dB in Eco Mode

2,30 kg / 5,07 lbs.

Vert.: +/-40°

85%

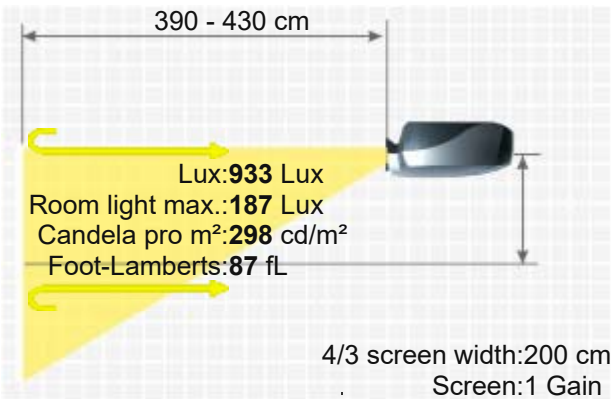

Frequenz	H-sync: 15-91,1 kHz V-sync: 24,85 Hz		
Foot-Lamberts	87 fL / max. 461 cm screen width 298 cd/m²		
Features	■ Eco Mode ■ Kensington Slot		
Status	2011 Discontinued (EOL) // Last update of the data: 2023-08-04		
Data			

More Details



HCinema

<https://www.projector-database.com/pro/optomars528-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.