

Panasonic PT LC56E/U

PANASONIC PT LC56E/U



Brief Introduction

Beta 2.5

Display Type



3 x 0,7" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

1600

518 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

4,0000 min. Lumen

1.305 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV 1080i, 720p, 480p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

160W UHM Lamp

Light Life

Articel Nr.: ET-LAC80

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,19

Objective

F=2,0-2,3 f=22,0-26,2 mm

Throw Ratio

1,5-1,8:1

Audio

2W

Connections

Cinch Video in

S-Video in

Cinch Stereo in

D-sub 15pin in und out

Serial Din 8 Port

Ceiling Mounting

Yes

Power


220W / standby 4W

Size WxHxD

297 x 65 x 209 mm (11,7"x2,6"x8,2") 4,03 L/dm³

Operating Noise

38 / 32 dB in Eco Mode

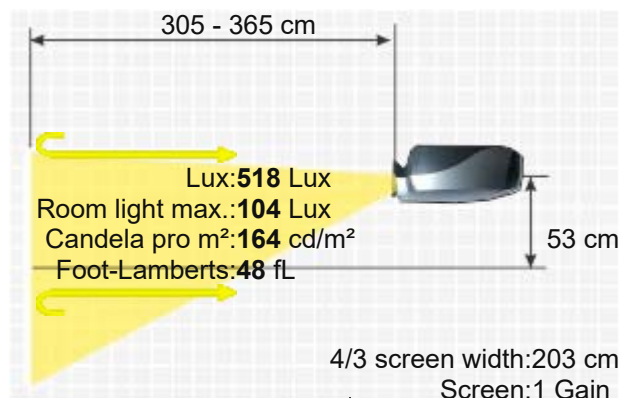

Key: 229 cm

Weight 2,20 kg / 4,85 lbs.
Keystone Vert.: +/-30°
Illumination 90%

Frequenz H-sync: 15-91 kHz
V-sync: 50-85 Hz

Foot-Lamberts 48 fL / max. 348 cm screen width
164 cd/m²

- Features
- Freeze
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Password protection
 - 3x digital zoom
 - Touch AutoSetup function
 - Control panel lock

Lamp ruby Ruby-LMP2772
Lamp original ET-LAC80
Optional Compatible lamp LMP-K2772
Remote control original N2QADC000011

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d2772>
2003 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptlc56e-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.