

Panasonic PT-RCQ80

PANASONIC PT-RCQ80



A brief introduction to the PT-RCQ80: The Panasonic 3D laser DLP projector offers 8000 Ansi lumens, a contrast of 10000:1 and a 4KESHIFT 2716 x 1528 4,150,048 pixel resolution. The manufacturer Panasonic specifies a service life of 20000 hours, which translates to over 13.7 years at 4 hours per day. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 909 cm is possible as the projector has 8000 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 606 cm is recommended. Playback of 1080P and 4K as well as 3D is also no problem for the projector, meaning that all Blu-ray formats currently available can be recognized by the projector. The projector was launched in 2019 and is no longer sold by the manufacturer.

 1 x 0,67" DLP Chip
4KESH 16/9 Ti Digital Light Processing Chip

Projector	8000	Screen	3556 Lux (bei 200 cm Screen)
Contrast	10000:1 full on/off	Screen	10000:1 full on/off
Black Level	0,8000 min. Lumen	Screen	0,356 min. Lumen

Vert.: +50% -16% Hori.: +30% -10%

4KESHIFT 2716 x 1528 4.150.048 Pixel
(4K2K) 3840 x 2160 mit E-Shift

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Articel Nr.: N2QAYA000210

20000 h. / 24000 h. in Eco Mode

0,00 € Laser

Powered


Powered 1,41

F=1,7-1,9 f=25,6-35,7 mm

1,71-2,41:1

-

3G/HD-SDI input
DVI-D 24-pin x 1'
HDMI IN

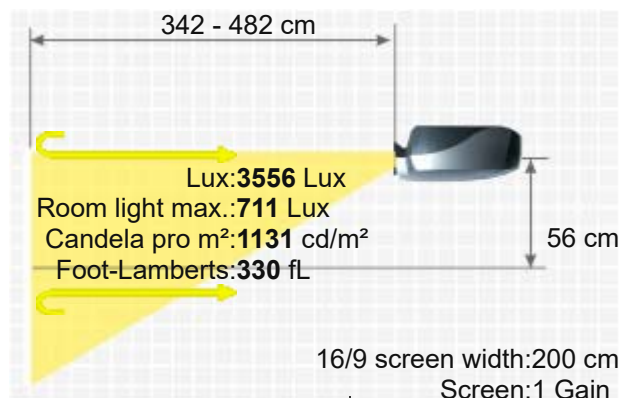

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

SYNC IN BNC x 1
 SYNC OUT BNC x 1
 SERIAL IN D-sub 9-pin (female) x 1 for external control (RS-232C compliant)
 SERIAL OUT D-sub 9-pin (male) x 1 for link control
 REMOTE 1 IN M3 x 1 for wired remote control
 REMOTE 1 OUT M3 x 1 for link control (for wired remote control)
 REMOTE 2 IN D-sub 9-pin (female) x 1 for external control (parallel)
 LAN RJ-45 x 1
 USB

Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 880W
 498 x 200 x 581 mm (19,6"x7,9"x22,9") 57,87 L/dm³
 40 / 38 dB in Eco Mode

Weight
 Keystone
 Illumination

24,20 kg / 53,35 lbs.
 Vert.: +/-40°
 Hori.: +/-15°
 -

Frequenz


-

Foot-Lamberts

330 fL / max. 909 cm screen width
 1131 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.

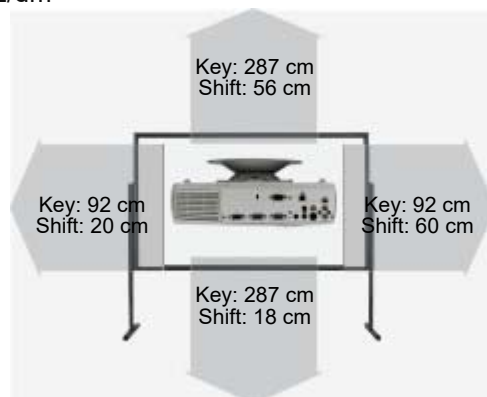

Remote control original	N2QAYA000210
Ceiling bracket original	ET-PKD130B
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Object lens 2nd hand original	ET-DLE450
Object lens 2nd hand original	ET-DLE350
Object lens original	ET-DLE250
Object lens original	ET-DLE170
Optional	
Object lens 2nd hand original	ET-DLE150Z
Object lens original	ET-DLE150
Object lens original	ET-DLE105
Object lens original	ET-DLE085
Object lens original	ET-DLE060
Object lens original	ET-DLE055
Object lens original	ET-DLE035
Objektiv original	ET-DLE020

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002749>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE450	5.36-8.58:1	10.7-17.2 m			Powered
ET-DLE350	3.58-5.45:1	7.2-10.9 m			Powered
ET-DLE250	2.27-3.62:1	4.5-7.2 m			Powered
ET-DLE170*	1.71-2.41:1	3.4-4.8 m			Powered
ET-DLE150	1.3-1.89:1	2.6-3.8 m			Powered
ET-DLE105	0.98-1.32:1	2-2.6 m			Powered
ET-DLE085	0.78-0.98:1	1.6-2 m			Powered

ET-DLE060	0.6-0.8:1	1.2-1.6 m	Powered
ET-DLE020	0.28-0.3:1	0.6-0.6 m	Powered
Fix Optional Lenses			
ET-DLE055	0.79:1	1.6 m	No Zoom
ET-DLE035	0.38:1	0.8 m	No Zoom

Status

2019 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2020-02-17 19:02:36

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrcq80-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.