


PLUS

U4-111 | U4-131

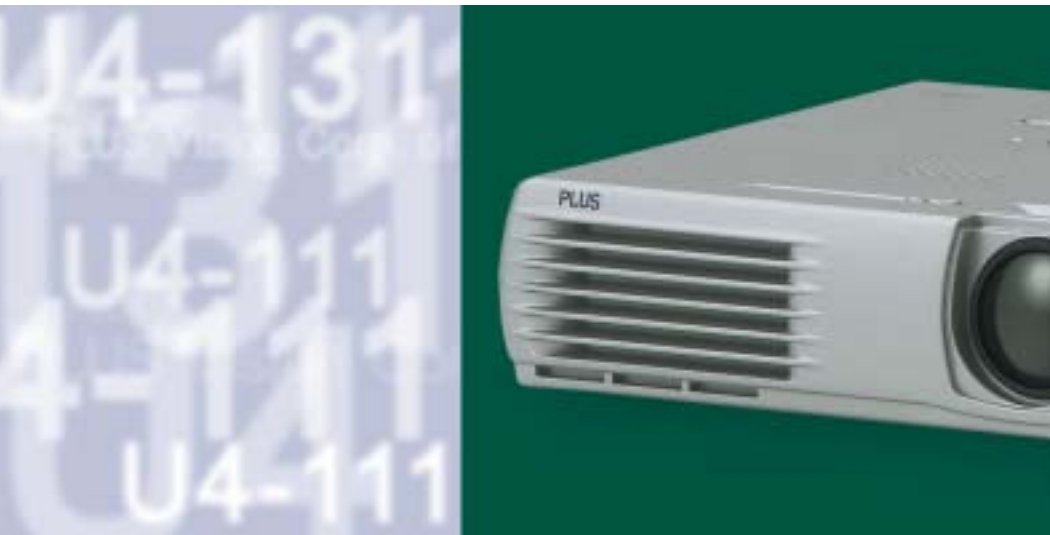

Up to 1,500 ANSI lumens
corner-to-corner brightness

Only 3 pounds

Eco-mode lets you increase
lamp life by 30%

10x digital zoom instantly targets and
enlarges the fine print at the touch of
a button

Connects to virtually any computer
or video source

Short-focus lens allows for big-screen
presentations in cramped quarters

Digital keystone correction

Wireless remote control and built-in
control panel

HDTV compatible

INTRODUCING THE BRIGHTEST PROJECTORS IN THEIR CLASS: THE 3 LB.

U4 SERIES FROM PLUS. WITH UP TO 1500 LUMENS AND A 1500:1

CONTRAST RATIO, THE U4 SERIES BOASTS IMAGERY THAT'S CRISPER,

CLEANER AND BRIGHTER THAN EVER. THE CEILING-MOUNTABLE U4 ALSO

COMES WITH AN ECO-MODE OPTION THAT LETS YOU SAVE BULB LIFE.



PLUS Vision Corp.

9610 SW SUNSHINE CT.
SUITE 800
BEAVERTON, OR 97005
800-211-9001 • 503-748-8700
www.buyplusdirect.com



U4-111 | U4-131

Specifications	U4-111	U4-131
Resolution	SVGA, 800 x 600 pixels	XGA, 1024 x 768 pixels
RGB Signal	SVGA (true)	XGA (true)
	XGA (compressed)	SXGA (compressed)
	VGA (expansion/true)	SVGA/VGA (expansion/true)
Brightness	1200 ANSI lumens	1500 ANSI lumens
Contrast Ratio	1500:1 (Full on/off)	1500:1 (Full on/off)
Aspect Ratio	4:3, supports 16:9	4:3, supports 16:9
Projection Lens	F=2.4, f=23 mm	F=2.4, f=23 mm
	Manual focus	Manual focus
Digital Keystone Correction	+25/-35 degrees	+25/-35 degrees
Digital Zoom	10x	10x
Light Resource	150-watt lamp, 1,500 hrs.	150-watt lamp, 1,500 hrs.
	2,000 hrs. in Eco-mode	2,000 hrs. in Eco-mode
Color Palette	16.7 million colors	16.7 million colors
Projection Positions	Front/rear, table/ceiling	Front/rear, table/ceiling
Projection Distance	3.9-21.7 ft./1.2-6.6 m	3.9-27.9 ft./1.2-8.5 m
Image Size	28"-200" diagonal/.71-5.08 m	36"-200" diagonal/.91-5.08 m
Video Signal	NTSC3.58, NTSC4.43, PAL, PAL-M,	NTSC3.58, NTSC4.43, PAL, PAL-M,
	PAL-N, PAL60, SECAM,	PAL-N, PAL60, SECAM,
	YCbCr (NTSC, PAL),	YCbCr (NTSC, PAL),
	YPbPr (480p, 720p, 1080i)	YPbPr (480p, 720p, 1080i)
Audio	Mono 0.5 watt	Mono 0.5 watt
Dimensions Excluding Lens and Stand:		
Height	2.08 in./53 mm	2.08 in./53 mm
Width	7.5 in./190 mm	7.5 in./190 mm
Length	9.4 in./239 mm	9.4 in./239 mm
Weight	3.3 lb./1.5 kg	3.3 lb./1.5 kg

Included accessories:

- Wireless remote control
- Power cable (6 ft./1.8 m)
- Video cable (6.5 ft./2 m)
- S-video cable (6.5 ft./2 m)
- 3.5 mm mini plug audio cable (6.5 ft./2 m)
- 3.5 mm stereo plug to RCA
- DVI to mini D-sub 15 pin (6.5 ft./2 m)
- Soft carrying case
- User's manual

Optional accessories:

- ATA shipping cases
- VGA cables (9 ft., 12 ft.)
- DVI-D cable (6.5 ft./2 m)
- 3.5 mm, 4-pole plug to RCA component cable (5 ft./1.5 m)
- 15-pin to RCA component cable (10 ft./3 m)
- AverEPack 300 - laptop-free presentation system
- Display-to-Go - output DVI from any laptop



Presentation Screens

Choose from a variety of portable presentation screens from PLUS. They will save the day in any presentation environment.



Replacement Bulbs

PLUS offers a wide array of replacement bulbs so you can carry a spare anywhere.



Remote Controls

Choose from a variety of wireless remotes to fit any presentation environment.



PLUS Vision Corp.

9610 SW SUNSHINE CT.
SUITE 800
BEAVERTON, OR 97005
800-211-9001 • 503-748-8700
www.buyplusdirect.com