

Polaroid Polaview 201



Brief Introduction

Beta 2.5

With the Polaview 201, manufacturer Polaroid offers an LCD projector with SVGA 800 x 600 resolution and a contrast of 150:1. Thanks to the brightness of 300 Ansi lumens, an image width of 151 cm is possible. In room light, the image should be max. 101 cm wide. This model is no longer offered by Polaroid. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.

Display Type



3 x 1,3" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

300

100 Lux (200 cm Screen width)

Contrast

150:1 full on/off

150:1 full on/off

Black Level

2,0000 min. Lumen

0,68 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC, NTSC 4.43, PAL

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

Light Source

250W Metalldampf Lamp

Article Nr.: PV201 / 623885

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,6

Objective


F=3,0-3,8 f=46,5-74,4 mm

Throw Ratio

1,76-2,82:1

Audio

3W

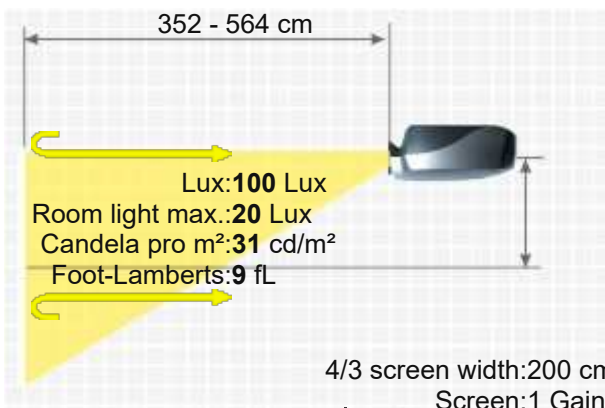

Connections

-2 computer video
2 TV video (NTSC, PAL, SECAM, S-VHS)
2 computer stereo audio
2 TV stereo audio
RS232C control port
Cyclops interactive pointer system
Outputs Stereo audio
1 RGB monitor

Ceiling Mounting

-

Power

250W

Size WxHxD

483 x 175 x 290 mm (19"x6,9"x11,4") 24,51 L/dm³

Operating Noise

-

Weight

9,50 kg / 20,94 lbs.

Keystone

-

Illumination

-

Frequenz

-

Foot-Lamberts

9 fL / max. 151 cm screen width

31 cd/m²

Features

-

Screen Mirroring

-

Optional accessories

Lampe Original

PV201 / 623885

EOL €



Status
Data - Discontinued (EOL) // Last update of the data: 2026-06-09



HCinema

<https://www.projector-database.com/pro/polaroidpolaview201-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.