

Polaroid Polaview XGA 338

POLAROID POLAVIEW XGA 338



Brief Introduction

Beta 2.5

The standard portable Polaview XGA 338 LCD projector from Polaroid has 750 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 238 cm with its 750 Ansi lumens. In room light, however, the image width should ideally be less than 159 cm. The projector is no longer sold by the manufacturer.

Display Type

3 x 0,9" TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector: 750
Screen: 243 Lux (bei 203 cm Screen)

Contrast

Projector: 250:1 full on/off
Screen: 250:1 full on/off

Black Level

Projector: 3,0000 min. Lumen
Screen: 0.984 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

NTSC, NTSC 4.43, , PAL (incl. PAL- M, N)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

Light Life

150W UHP Lamp

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,7-2,0 f=33-43 mm

Throw Ratio

1,8-2,35:1

Audio

1W Mono

Connections

Input terminals: PC; RGB: mini D-sub 15pin x1; Video: RCA jack, S-video jack; Audio: RCA jacks (stereo) **Output terminals:** PC; RGB: mini D-sub 15pin x1 Communication terminals: RS232C x 1 (direct commund available) DIN8-pin, USB terminal for Maus

Ceiling Mounting

-

Power


230W

Size WxHxD

242 x 79 x 294 mm (9,5"x3,1"x11,6") 5,62 L/dm³

Operating Noise

37dB

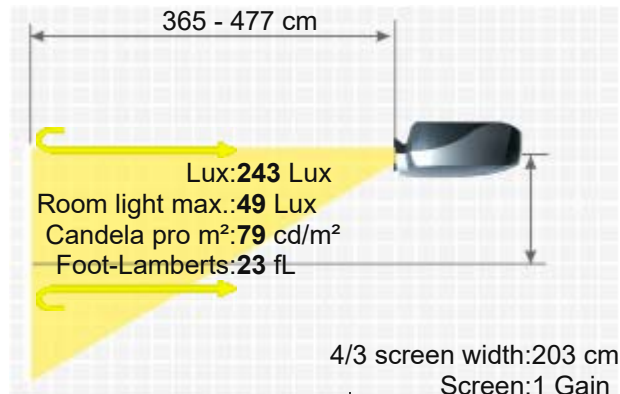

Weight

3,20 kg / 7,05 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-92 kHz
Range max.: 160 MHz

Foot-Lamberts

23 fL / max. 238 cm screen width
79 cd/m²

Features

- Freeze
- Remote control with laser pointer

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



HCinema

<https://www.projector-database.com/pro/polaroidpolaviewsxga338-en.html>

More Details

