

Premier PD S550



P R E M I E R P D S 5 5 0



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

The PD S550 DLP has 2000 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. Due to the brightness of 2000 Ansi lumens, a picture width of 389 cm is possible. In room light, the picture should be max. 259 cm wide. On the market since 2007, the model is no longer offered by the manufacturer Premier.



1 x 0,55" DDR DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

2000

2000:1 full on/off

1,0000 min. Lumen

Screen

667 Lux (bei 200 cm Screen)

2000:1 full on/off

0,334 min. Lumen

SVGA 800 x 600

480.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W Lamp

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,07

-

-

1 x 2W

D-sub 15pin in

S-Video in

Cinch Video in

RS232C in

USB in

Mini Jack Audio in

Yes

280W

253 x 97 x 201 mm (10"x3,8"x7,9") 4,93 L/dm³

36 / 34 dB in Eco Mode


2,70 kg / 5,95 lbs.

Vert.: +/-15°

80%

-

62 fL / max. 389 cm screen width
212 cd/m²

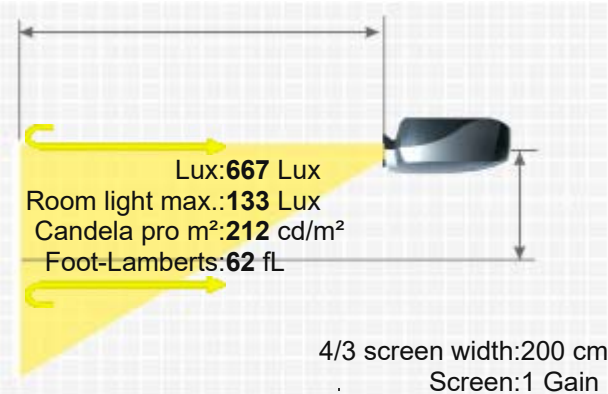

Features

- Eco Mode
- 4-segment RGBW colour wheel.

Status
Data

2007 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/premierpds550-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.