

Premier PD X750



P R E M I E R P D X 7 5 0



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,5000 min. Lumen

0,501 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

1 x 2W

Connections

D-sub 15pin in
S-Video in
Cinch Video in
RS232C

Ceiling Mounting

-

Power

300W

Size WxHxD

253 x 97 x 201 mm (10"x3,8"x7,9") 4,93 L/dm³

Operating Noise

-

Weight

3,00 kg / 6,61 lbs.

Keystone

Vert.: +/-15°

Illumination

80%

Frequenz

-

Foot-Lamberts

93 fL / max. 477 cm screen width
319 cd/m²


Features

■ 4-segment colour wheel

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

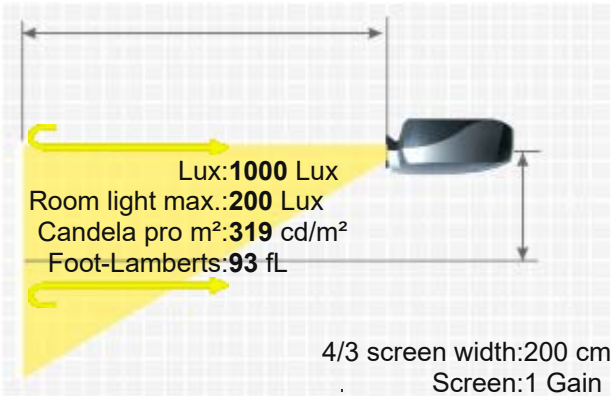



HCinema

<https://www.projector-database.com/pro/premierpdx750-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.