

Prolight PLF700AX



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Prolight model PLF700AX is an LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. An image width of up to 369 cm is possible. However, the picture should be smaller in room light. We recommend max. 246 cm. It is no longer offered by the manufacturer Prolight.

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1800

450:1 full on/off

4,0000 min. Lumen

-

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

165W EHPL Lamp

2000 h.

-

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

1,8-2,3:1

1 x 2W

D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack

USB

RS232C

Yes

230W

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

37dB

3,10 kg / 6,83 lbs.

-

-

H-sync: 15-80 kHz

V-sync: 43-85 Hz

56 fL / max. 369 cm screen width


192 cd/m²

600 Lux (bei 200 cm Screen)

450:1 full on/off

1,342 min. Lumen

-

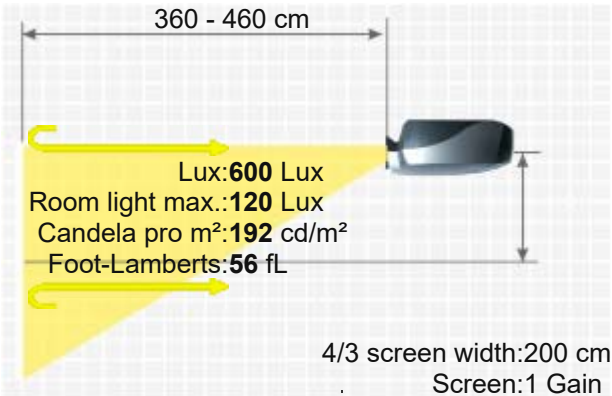

P R O L I G H T P L F 7 0 0 A X

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF700AX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.