

Prolight PLF701VX



Brief Introduction
Beta 2.5

The standard portable PLF701VX LCD projector from Prolight has 1850 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. An image width of up to 375 cm is possible as the projector has 1850 Ansi lumens. However, if room light is available, the picture should be max. 250 cm wide. It is no longer offered by the manufacturer Prolight.

Display Type

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen	1850	617 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level Offset	4,1111 min. Lumen	1,38 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

165W EHPL Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,23

Objective

F=1,7-2,1 f=26-32 mm

Throw Ratio

1,8-2,3:1

Audio

1 x 2W

Connections

D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power

230W

Size WxHxD

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise

37dB

Weight

3,10 kg / 6,83 lbs.

Keystone

-

Illumination


-

Frequenz

H-sync: 15-80 kHz
V-sync: 43-85 Hz

Foot-Lamberts

57 fL / max. 375 cm screen width
195 cd/m²

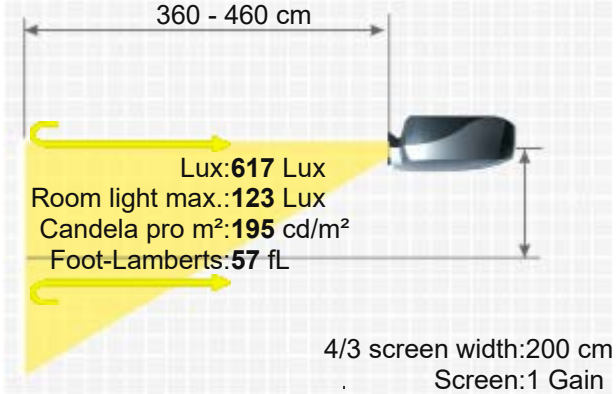

P R O L I G H T P L F 7 0 1 V X

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF701VX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.