


Prolight PLF702AS



Brief Introduction		The Prolight PLF702AS LCD projector has 1500 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. The projector is no longer sold by the manufacturer.	
Beta 2.5			
Display Type		3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display	
Ansi-Lumen	Projector	1500	Screen 500 Lux (bei 200 cm Screen)
Contrast	Projector	400:1 full on/off	Screen 400:1 full on/off
Black Level Offset	Projector	3,7500 min. Lumen	Screen 1,259 min. Lumen
Resolution		SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed	
Video Modes		PAL, SECAM, NTSC	
Application		Standard-Portabel External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source		165W EHPL Lamp	
Light Life		2000 h.	
Operating Costs		-	
Focus		Manual	
Zoom		Manual 1,23	
Objective		F=1,7-2,1 f=26-32 mm	
Throw Ratio		1,8-2,3:1	
Audio		1 x 2W	
Connections		D-sub 15pin in Cinch Video in S-Video in Mini Jack USB	
Ceiling Mounting		Yes	
Power		210W	
Size WxHxD		233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise		37dB	
Weight		3,10 kg / 6,83 lbs.	
Keystone		-	
Illumination		-	
Frequenz		H-sync: 15-80 kHz V-sync: 43-85 Hz	
Foot-Lamberts		46 fL / max. 337 cm screen width 158 cd/m²	
Features		-	

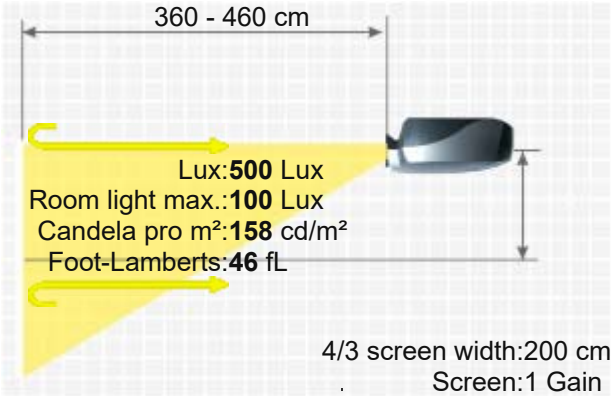

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF702AS-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.