


Prolight PLF780AX



Brief Introduction		The Prolight PLF780AX standard portable LCD projector has 1900 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. Due to the brightness of 1900 Ansi lumens, a picture width of 380 cm is possible. In room light, the picture should be max. 253 cm wide. It is no longer offered by the manufacturer Prolight.	
Beta 2.5			
Display Type		3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display	
Ansi-Lumen		Projector 1900	Screen 633 Lux (bei 200 cm Screen)
Contrast		450:1 full on/off	450:1 full on/off
Black Level Offset		4,2222 min. Lumen	1,416 min. Lumen
Resolution		XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed	
Video Modes		PAL, SECAM, NTSC	
Application		Standard-Portabel External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source		180W Lamp	
Light Life		2000 h.	
Operating Costs		-	
Focus		Manual	
Zoom		Manual 1,23	
Objective		F=1,7-2,1 f=26-32 mm	
Throw Ratio		1,8-2,3:1	
Audio		1 x 2W	
Connections		D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C	
Ceiling Mounting		Yes	
Power		230W	
Size WxHxD		233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise		37dB	
Weight		3,10 kg / 6,83 lbs.	
Keystone		-	
Illumination		-	
Frequenz		H-sync: 15-80 kHz V-sync: 43-85 Hz	
Foot-Lamberts		59 fL / max. 380 cm screen width 202 cd/m²	

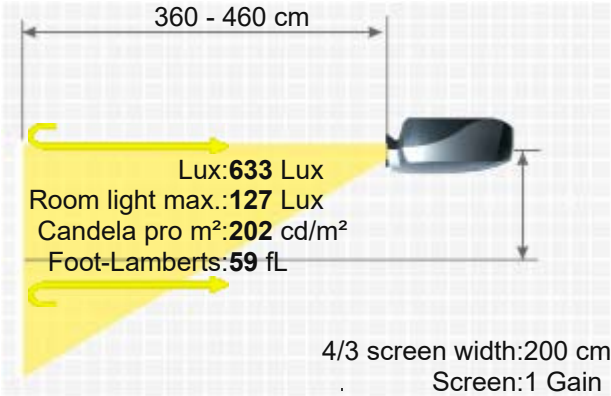

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF780AX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.