
Prolight PLF781AX



Brief Introduction Beta 2.5	The Prolight PLF781AX standard portable LCD projector has 1900 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. An image width of up to 380 cm is possible. However, the image should be smaller in room light. We recommend max. 253 cm. The projector is no longer sold by the manufacturer.
Display Type	3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1900
Projector: Contrast	450:1 full on/off
Projector: Black Level	4,2222 min. Lumen
Projector: Offset	-
Screen	633 Lux (bei 200 cm Screen) 450:1 full on/off 1,416 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	180W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	1,8-2,3:1
Audio	1 x 2W
Connections	D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	230W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB
Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	59 fL / max. 380 cm screen width 202 cd/m²

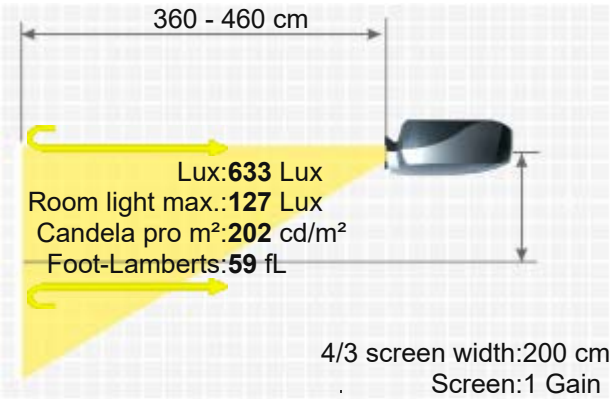

PROLIGHT PLF781AX

Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

https://www.projector-database.com/pro/prolightPLF781AX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.