

Prolight PLF994BX



A brief introduction to the PLF994BX: The Prolight LCD projector offers 2500 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 2500 Ansi lumens, an image width of 435 cm is possible. In room light, the picture should be max. 290 cm wide. It was launched on the market in 2006 and is no longer offered by the manufacturer Prolight.

 3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	2500	833 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level Offset	5,5556 min. Lumen	1,863 min. Lumen

Resolution XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes PAL, SECAM, NTSC

Application Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source 195W Lamp

Light Life 2000 h.

Operating Costs -

Focus Manual

Zoom Manual 1,23

Objective F=1,7-2,1 f=26-32 mm

Throw Ratio 1,6-2,0:1

Audio 1 x 2W

Connections DVI in
D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting Yes

Power 260W


Size WxHxD 233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise 37dB

Weight 3,10 kg / 6,83 lbs.

Keystone -
Illumination -

Frequenz H-sync: 15-80 kHz
V-sync: 43-85 Hz

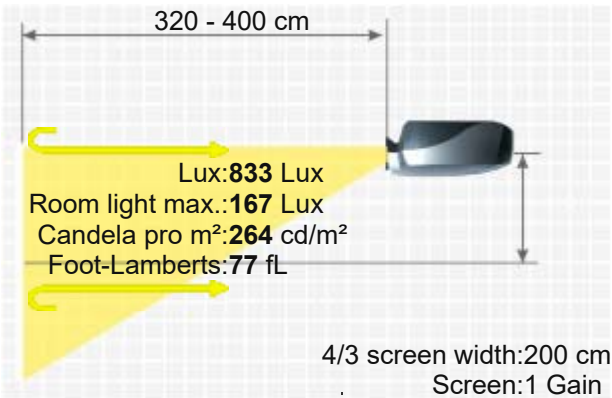

P R O L I G H T P L F 9 9 4 B X

Foot-Lamberts	77 fL / max. 435 cm screen width
	264 cd/m²
Features	-
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF994BX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.