

Proxima Pro AV 9400+/L



PROXIMA PRO AV 9400+/L



Brief Introduction

Beta 2.5

The Proxima model Pro AV 9400+/L is an LCD projector with SXGA 1280 x 1024 resolution and a contrast of 350:1. The integrated lens shift gives freedom when positioning the projector. The projector can illuminate an image width of up to 486 cm thanks to its 3300 Ansi lumens. In room lighting, however, the picture width should ideally be less than 324 cm. The projector is no longer sold by the manufacturer, but is still very popular in our projector database.

Display Type



3 x 1,8" LCD TFT Panel mit MLA

SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3300

1001 Lux (bei 203 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

9,4286 min. Lumen

2.887 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

SXGA 1280 x 1024

1.310.720 Pixel

Video Modes

NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

440W DC Metaldampf Lamp

Articel Nr.: LAMP-018

Light Life

750 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,29

Objective


F=2,0-2,3 f=75,7-97,5 mm

Throw Ratio

2,12-2,73:1

Audio

2 x 3W Stereo

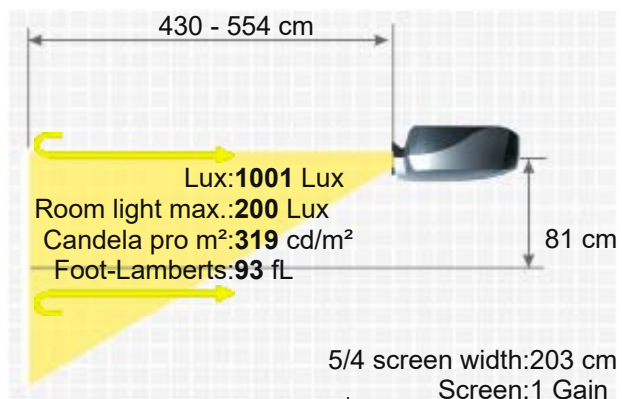

5/4 screen width:203 cm
Screen:1 Gain

Connections

Input • 2 computer input channels Channel 1: RGB (HDI5) / DFP (Digital PanelLink Interface) Channel 2: BNC (R, G, B, H, V) Each channel includes: RCA type stereo audio (R, L-mono), Maus control port, USB port • 2 video input channels Each channel includes: 3 BNC (for component (R-Y, B-Y, Y) und composite) 1 mini DIN 4-pin (for S-Video) 1 RCA type stereo audio (R, L-mono)

Output • 1 monitor output HD15 + RCA type stereo audio (R, L-mono) • 1 video output 3 BNC (for component und composite) 1 mini DIN 4-pin (for S-Video) 1 RCA type stereo audio (R, L-mono) Control Input Sources • RS232C (DB9)

Ceiling Mounting

Yes

Power

650W

Size WxHxD

390 x 233 x 582 mm (15,4"x9,2"x22,9") 52,89 L/dm³

Operating Noise

42dB



Weight

17,80 kg / 39,24 lbs.

Keystone

-

Illumination

85%

Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz	
Foot-Lamberts	93 fL / max. 486 cm screen width 319 cd/m²	
Features	■ Lens shift Funktion ■ Remote control with laser pointer und mouse control ■ Crestron®-Software compatible. ■ Lens Shift +/- 12°	
Optional	Bulb only	NLMP3153
	Lamp ruby	Ruby-LMP3153
	Lamp original	LAMP-018
	Compatible lamp	LMP-K16243
	Universal Remote original	Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3160>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Proxima LENS-018	2.6-3.5:1	5.3-7.1 m	+/-50%		Powered
Proxima LENS-011	4.6-6:1	9.3-12.2 m	+/-40%		Powered
Proxima LENS-005	2.07-2.67:1	4.2-5.4 m	+/-50%		Powered
Proxima LENS-004	3.4-4.5:1	6.9-9.1 m	+/-40%		Powered
Proxima LENS-003	1.8-2.9:1	3.7-5.9 m	+/-50%		Powered
Fix Optional Lenses					
Proxima LENS-019	0.8:1	1.6 m	+/-0.0%		No Zoom
Proxima LENS-002	6.9:1	14 m	+/-40%		No Zoom
Proxima LENS-001	1.2:1	2.4 m	+/-40%		No Zoom

Status
Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/proximaproav9400plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.