

Proxima UltraLight LX

PROXIMA ULTRALIGHT LX



Brief Introduction

Beta 2.5

The Proxima UltraLight LX model is an LCD projector with XGA 1024 x 768 resolution and a contrast of 250:1. With a brightness of 800 Ansi lumens, a picture width of 246 cm is possible. In room light, the picture should be max. 164 cm wide. It is no longer offered by the manufacturer Proxima.

Display Type



3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

800

259 Lux (bei 203 cm Screen)

Contrast

250:1 full on/off

250:1 full on/off

Black Level

3,2000 min. Lumen

1.049 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

NTSC, NTSC 4.43, PAL, SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Light Life

Articel Nr.: LAMP-020

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,3

Objective

F=1,7-2,0 f=33,2-43,1 mm

Throw Ratio

1,82-2,36:1

Audio

1W Mono

Connections

1 Computer

1 audio Cinch Stereo

2 video

1 S-video

Ceiling Mounting

-

Power


180W

Size WxHxD

215 x 128 x 326 mm (8,5"x5"x12,8") 8,97 L/dm³

Operating Noise

45dB

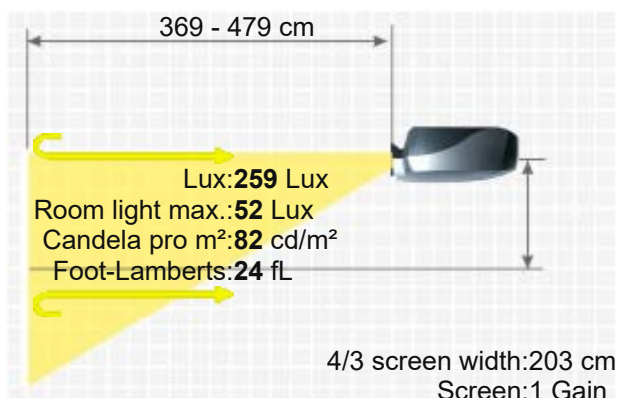

Weight

3,80 kg / 8,38 lbs.

Keystone

-

Illumination

90%

Frequenz

H-sync: 15-100 kHz

V-sync: 50-100 Hz

Range max.: 163 MHz

Foot-Lamberts

24 fL / max. 246 cm screen width

82 cd/m²

Features

■ Remote control with laser pointer und mouse control

-

Optional

Osram bulb only

NLMP3178

Lamp ruby

Ruby-LMP3178

Lamp original

LAMP-020

Compatible lamp

LMP-K3178

Universal Remote original

Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3178>

More Details



HCinema

<https://www.projector-database.com/pro/proximaultralightlx-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.