

Pyle PRJLE55



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

The standard portable PRJLE55 LCD projector from Pyle has 108 Ansi lumens, a contrast of 800:1 and a WVGA 800 x 480 resolution. As Pyle specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. 106 cm image width the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 71 cm. It was launched in 2012 and is no longer offered by the manufacturer Pyle.



1 x 7" LCD TFT Panel

WVGA 16/9 Liquid Crystal Display

Projector

108 / 1800 Lumen

800:1 full on/off

0,1350 min. Lumen

Screen

48 Lux (bei 200 cm Screen)

800:1 full on/off

0,06 min. Lumen

WVGA 800 x 480

384.000 Pixel

HDTV 1920 x 1080 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

LED

-

0,00 € LED

Manual

No Zoom

-

-

-

HDMI in
D-sub 15 pin in
YUV in
S-Video in
Cinch Video in
Cinch Stereo in

-

-

-

-


-

-

-

-

4 fL / max. 106 cm screen width

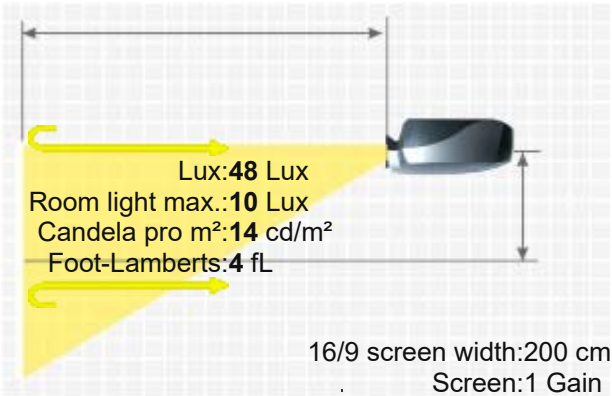

14 cd/m²

Features
Status
Data

-
2012 Discontinued (EOL) // Last update of the data: 2024-06-04

More Details



HCinema

<https://www.projector-database.com/pro/pyleprjle55-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.