

Pyle PRJV66



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Screen Mirroring

A brief introduction to the PRJV66: The Pyle standard portable LCD projector offers 72 Ansi lumens, a contrast of 600:1 and a VGA 640 x 480 resolution. The lamp of the projector is specified with a lamp life of 6000 hours, which is over 8.2 years if enjoyed for two hours every day. As Pyle specifies the brightness of the projector in lumens, we have calculated an approximate ansi-lumen value in this case. An image width of up to 74 cm is possible. In room light, however, the image should be smaller. We recommend max. 49 cm. The model was built by Pyle in 2011 and is no longer current.



1 x 5" LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Projector

525 / 1200 Lumen

600:1 full on/off

0,8750 min. Lumen

Screen

175 Lux (200 cm Screen width)

600:1 full on/off

0,293 min. Lumen

VGA 640 x 480
307.200 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

150W Lamp

6000 h.

-

Manual

No Zoom

F=2,9 f=160mm

-

-

D-sub 15 pin in
S-Video in
Cinch Video in
Antenne in

-

200W

310 x 95 x 255 mm (12,2"x3,7"x10") 7,51 L/dm³

-

6,00 kg / 13,23 lbs.

-

-


-

16 fL / max. 74 cm screen width

55 cd/m²

-

Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

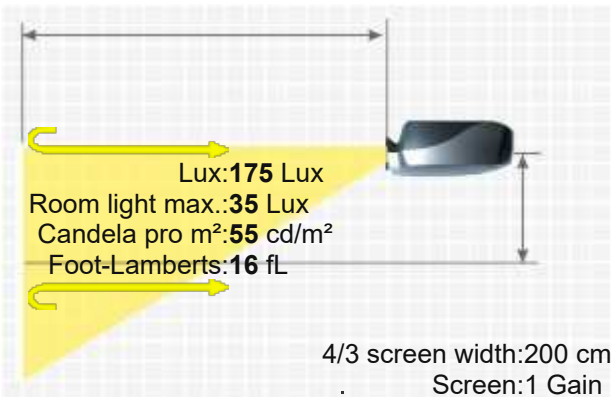

Optional accessories



Luftfilter universal

uni3mm

18,15 €

Status
Data

2011 Discontinued (EOL) // Last update of the data: 2025-11-25

More Details



HCinema

<https://www.projector-database.com/pro/pyleprjv66-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.