

Pyle UPRJHD66



PYLE UPRJHD66



Brief Introduction

Beta 2.5

Display Type



1 x 5" LCD Panel
VGA 4/3 Liquid Crystal Display

Ansi-Lumen

525 / 1800 Lumen

175 Lux (200 cm Screen width)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

0,6563 min. Lumen

0,22 min. Lumen

Offset

-

Resolution

VGA 640 x 480
307.200 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

150W Lamp

Light Life

6000 h. 8000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=3,8 f=160mm

Throw Ratio

-

Audio

2 x 5W

Connections

2 x HDMI in
D-sub 15 pin in
YUV in
Cinch Video in
Cinch Stereo in

Ceiling Mounting

-

Power

200W

Size WxHxD

279,4 x 152,4 x 381 mm (11"x6"x15") 16,16 L/dm³

Operating Noise

-

Weight

5,26 kg / 11,02 lbs.

Keystone

Vert.: +/-20°

Illumination


-

Frequenz

-

Foot-Lamberts

16 fL / max. 91 cm screen width
55 cd/m²

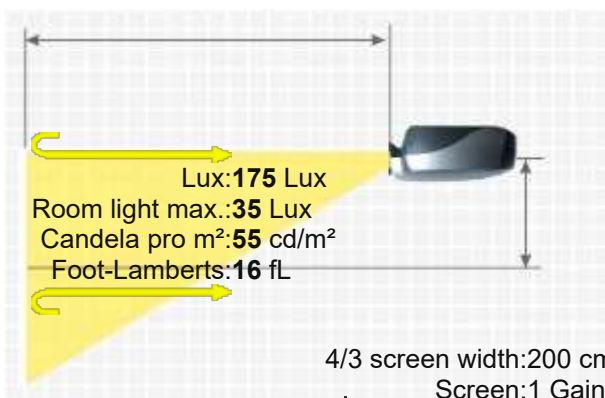

- Features

Screen Mirroring
- Eco Mode

Picture-in-Picture

Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

Optional accessories

	Luftfilter universal	uni3mm	18,15 €
--	----------------------	--------	---------

Status

2017 Discontinued (EOL) // Last update of the data: 2025-12-22

Data

Created: 2017-03-09 15:29:16

More Details



HCinema

<https://www.projector-database.com/pro/pyleuprjhd66-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.