

Roverlight Aurora DX1500 SLIM (X1500 Slim)

ROVERLIGHT AURORA DX1500 SL



With the Aurora DX1500 SLIM (X1500 Slim), manufacturer Roverlight offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 1800:1. Thanks to the brightness of 1500 Ansi lumens, a picture width of 337 cm is possible. In room light, the picture should be max. 225 cm wide. This model is no longer offered by Roverlight.



1 x 0,7" 12° DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

1500
1800:1 full on/off
0,8333 min. Lumen

Screen

485 Lux (bei 203 cm Screen)
1800:1 full on/off
0.27 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W P-VIP Lamp

2000 h.

-

Manual

Manual 1,2

F=2,44-2,69

-

2W Mono

1 RGB input (via M1), 1 DVI (Digital Visual Interface - via M1), 1 audio inputs (mini jack× 1), 1 S-Video input (mini DIN/4 pins× 1), 1 composite video input (RCA× 1), 1 RGB output, (D-sub 15pins× 1), 1 component video input (Y Cb Cr× 1, via M1), RS232 (Maus or control)

-


-

-

-

1,70 kg / 3,75 lbs.

-

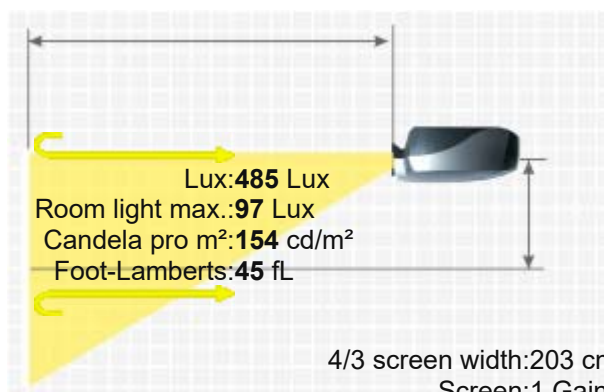

4/3 screen width: 203 cm
Screen: 1 Gain

Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	45 fL / max. 337 cm screen width 154 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/roverlightaurorax1500slim-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.