

Roverlight Aurora DX2000 PRO (X2000 Pro)

ROVERLIGHT AURORA DX2000 PRO



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

A brief introduction to the Roverlight Aurora DX2000 PRO (X2000 Pro). The standard portable DLP projector has an XGA 1024 x 768 resolution and a contrast of 600:1. An image width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the image should be max. 259 cm wide. This model is no longer offered by Roverlight.




1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector
2000
600:1 full on/off
3,3333 min. Lumen

Screen
647 Lux (bei 203 cm Screen)
600:1 full on/off
1.084 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
HDTV480p - 1080i VideoNTSC , PAL , SECAM
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.
200W UHP Lamp
2000 h.

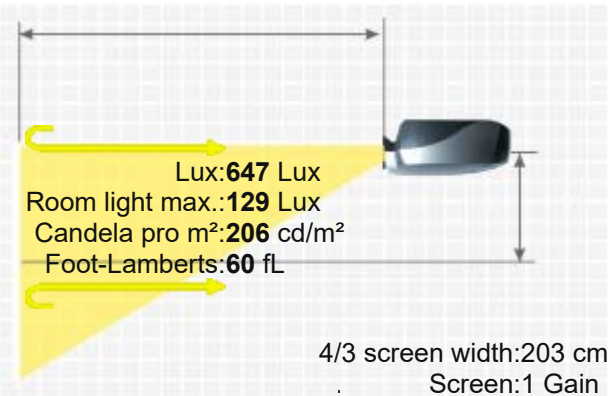

2 x 3W
1 RGB input (D-sub 15pins× 1), 1 DVI (Digital Visual Interface), 1 audio inputs (Stereo mini jack× 1), 1 audio (RCA L&R× 2), 1 PS/2 connectivity (Centronic 8 pins), 1 component video input (Y Cb Cr× 1), 1 S-Video input (mini DIN/4 pins× 1), 1 composite video input (RCA× 1), 1 RGB outputs (D-sub 15pins× 1), 1 audio outputs (Stereo mini jack× 1)

-
-
-
-

2,90 kg / 6,39 lbs.

Keystone Illumination	- 90%
Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	60 fL / max. 389 cm screen width 206 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/roverlightaurorax2000pro-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.