

Roverlight Spark LX2500+



ROVERLIGHT SPARK LX2500+



Brief Introduction

Beta 2.5

The standard portable Roverlight Spark LX2500+ LCD projector has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 435 cm thanks to its 2500 Ansi lumens. In room light, however, the image width should ideally be less than 290 cm. This model is no longer offered by Roverlight.

3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

2500

400:1 full on/off

6,2500 min. Lumen

-

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

150W P-VIP Lamp

2000 h.

-

Powered

Powered 1,2

F=2,0

-

-

1 RGB input (D-sub 15 pins× 1), 1 S-Video input (mini DIN/4 pins× 1), 1 composite video input (RCA× 1), 1 component video input (Y Cb Cr× 1) via RGB, USB,RGB output (D-sub 15 pins× 1)



Yes

-

272 x 86 x 211 mm (10,7"x3,4"x8,3") 4,94 L/dm³

-

1,80 kg / 3,97 lbs.

-

Illumination

90%

Frequenz


H-sync: 15-70 kHz

V-sync: 43-120 Hz

Foot-Lamberts

75 fL / max. 435 cm screen width

257 cd/m²

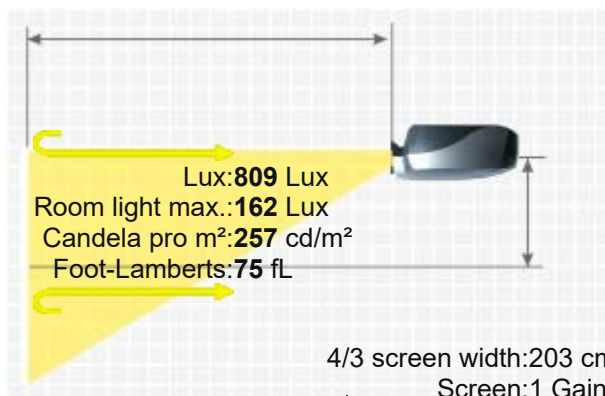

4/3 screen width: 203 cm
Screen: 1 Gain

Data



More Details



HCinema

<https://www.projector-database.com/pro/roverlightsparklx2500plus-en.html>