

Runco CL 810



RUNCO CL 810



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

With the CL 810, manufacturer Runco offers a DLP projector with HDTV 1280 x 720 resolution and a contrast of 3100:1. The built-in lens shift function provides freedom when setting up. A picture width of up to 359 cm is possible. However, the image should be smaller in room light. We recommend max. 239 cm. On the market since 2005, the model is no longer offered by the manufacturer Runco. It should also be noted that, unfortunately, there are no longer any replacement lamps available for the projector, neither originals nor replicas.



1 x DLP Chip

HDTV 16/9 Ti Digital Light Processing Chip

Projector

1250

3100:1

0,4032 min. Lumen

Vert.: +/-50%

HDTV 1280 x 720

921.600 Pixel

HDTV 1920 x 1080 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

250W / 200W im Eco Mode Lamp

Articel Nr.: RUPA 007175

2000 h.

-

Powered

Powered 1,35

-

1,80-2,43:1

No

HDMI

5 x BNC RGBHV


YUV in

S-Video

Cinch Video in

RS232C


12V Trigger

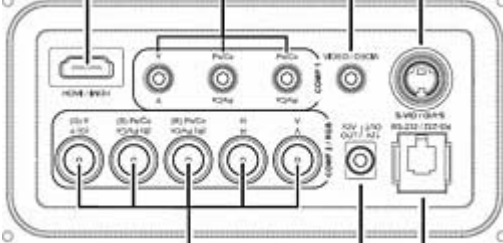

Yes

310W

500 x 224,8 x 462,5 mm (19,7"x8,9"x18,2") 51,74 L/dm³

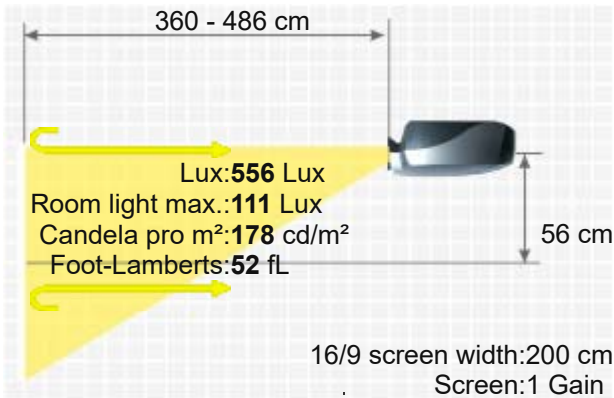

Operating Noise

-

Weight 15,42 kg / 34 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-80 kHz
V-sync: 50-100 Hz

Foot-Lamberts 52 fL / max. 359 cm screen width
178 cd/m²

- Features
- Lens shift Funktion
 - Eco Mode
 - Gamma correction
 - Dynamic iris
 - Digital image shift
 - Picture-in-Picture
 - Remote control with backlight
 - Overscan adjustable
 - De-interlacer with 3:2 pull down



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Proteus F	3.65-5.68:1	7.3-11.4 m	63-20%		Powered
Runco Proteus E	2.42-3.57:1	4.8-7.1 m	71-14%		Powered
Runco Proteus D	1.82-2.38:1	3.6-4.8 m	70-13%	+/-13%	Powered
Runco Proteus C	1.45-1.75:1	2.9-3.5 m	70-10%		Powered
Runco Proteus B	1.22-1.44:1	2.4-2.9 m	72-11%		Powered

Fix Optional Lenses					
Runco Proteus A	0.67:1	1.3 m	+/-2%		No Zoom

Status 2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema

<https://www.projector-database.com/pro/runcocl810-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.