

Sahara Protector SVGA

SAHARA PROTECTOR SVGA



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

The standard portable Protector SVGA DLP has 1500 Ansi lumens, a contrast of 1500:1 and an SVGA 800 x 600 resolution. An image width of up to 337 cm is possible as the projector has 1500 Ansi lumens. However, if room light is available, the picture should be a maximum of 225 cm wide. On the market since 2006, the model is no longer offered by the manufacturer Sahara.



1 x 0,6" DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

1500

1500:1 full on/off

1,0000 min. Lumen

500 Lux (bei 200 cm Screen)

1500:1 full on/off

0,334 min. Lumen

.

SVGA 800 x 600

480.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

200W Lamp

3000 h. 4000 h. in Eco Mode

-

Manual

Manual 1,22

-

-

2W Mono

-

Yes

300W


328 x 86 x 238 mm (12,9"x3,4"x9,4") 6,71 L/dm³

36dB

3,50 kg / 7,72 lbs.

Vert.: +/-15°

-

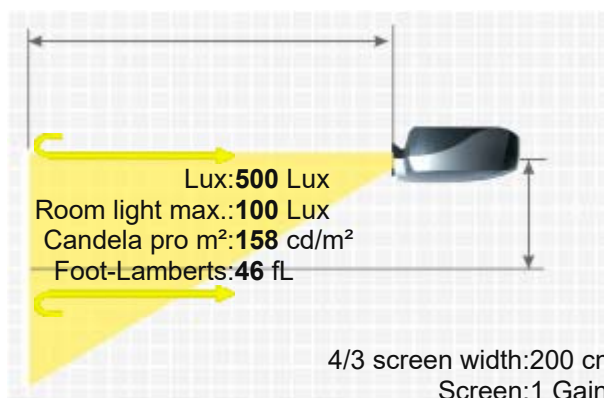

Frequenz

Foot-Lamberts

Features

Status

H-sync: 15-70 kHz
V-sync: 50-85 Hz

46 fL / max. 337 cm screen width

158 cd/m²

■ Eco Mode

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/saharaProtectorSVGA-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.