

Sahara SC 50

SAHARA SC 50



Brief Introduction

Beta 2.5

The standard portable SC 50 LCD has 700 Ansi lumens, a contrast of 350:1 and an SVGA 800 x 600 resolution. The manufacturer specifies a lamp life of 4000 hours, which translates to over 5.5 years at 2 hours per day. A picture width of up to 230 cm is possible. However, the picture should be smaller in room light. We recommend max. 153 cm. This model is no longer available from Sahara.

Display Type



3 x 0,9" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

700

226 Lux (bei 203 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

2,0000 min. Lumen

0.651 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

XGA 1024 x 768 compressed

NTSC, NTSC 4.43, PAL SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

Light Life

120W UHP Lamp

4000 h.

Operating Costs

-

Focus

-

Zoom

-

Objective

F=1,8-2,1 f=38-55 mm

Throw Ratio

2,08-3,01:1

Audio

1 x 1W Stereo

Connections

D-sub 15pin in

Cinch Video in

S-Video in

Ceiling Mounting

-

Power


-

Size WxHxD

236 x 99 x 282 mm (9,3"x3,9"x11,1") 6,59 L/dm³

Operating Noise

38dB

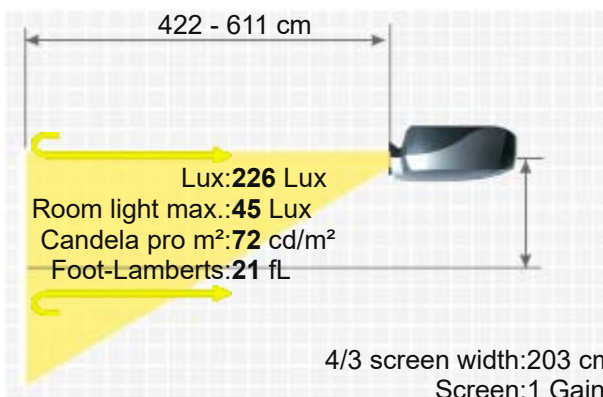

Weight

3,70 kg / 8,16 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-100 kHz

V-sync: 43,5-130 Hz

Foot-Lamberts

21 fL / max. 230 cm screen width

72 cd/m²

Features

-

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/saharasc50-en.html>

