

Sanyo PLC EF31E/L

SANYO PLC EF31E/L



The Sanyo PLC EF31E/L LCD projector has 5800 Ansi lumens, a contrast of 900:1 and an SXGA 1280 x 1024 resolution. The built-in lens shift function provides freedom when setting up. An image width of up to 645 cm is possible as the projector has 5800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 430 cm is recommended. This model is no longer offered by Sanyo.



3 x 1,8" LCD TFT Panel mit MLA
SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Projector	5800 / 2900 im singel lamp mode	Screen	1759 Lux (bei 203 cm Screen)
	900:1 full on/off		900:1 full on/off
	6,4444 min. Lumen		1.962 min. Lumen

Vert.: +/-40% (LNS S02 V=+/-50%)
SXGA 1280 x 1024

1.310.720 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

2 x 200W UHP Lamp

Articel Nr.: 610 292 4848

1000 h.

-

Powered


Powered 1,3

-

2,0-2,6:1

3W Stereo

1 x DVI
1 x Audio RCA x 2
Computer 2 / Video
5 x BNC / YUV
1 x Audio RCA x 2
1 x BNC Video/YC
1 x S-Video
1 x Audioaus. Eingang RCA x 2

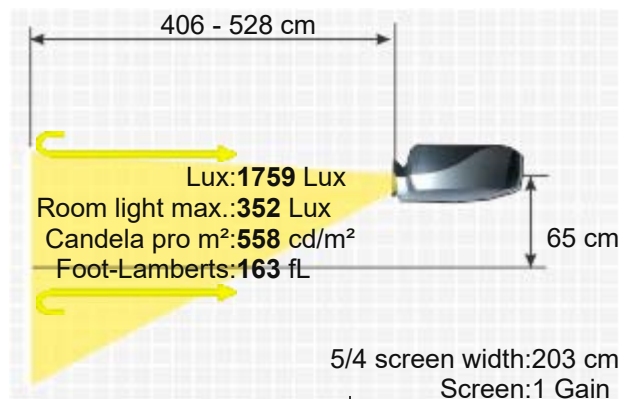

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

1 x USB
Control Port x 2
RS232C
Ceiling Mounting Yes
Power 550W
Size WxHxD 439 x 227 x 604 mm (17,3"x8,9"x23,8") 60,19 L/dm³
Operating Noise 45dB

Weight 21,00 kg / 46,3 lbs.
Keystone -
Illumination 90%

Frequenz H-sync: 15-120 kHz
V-sync: 50-120 Hz
Range max.: 230 MHz

Foot-Lamberts 163 fL / max. 645 cm screen width
558 cd/m²

- Features
- Lens shift Funktion (LNS S02 V=+/-50%)
 - Freeze
 - Kensington Slot
 - Gamma correction
 - Remote control with laser pointer und mouse control
 - Optional LAN network compatible.
 - Digital Zoom
 - RJ45 connector board optionally available
 - Faroudja DCDi optionally available
 - 10-bit digital gamma correction

Optional

Single Philips bulb only	NLMP3349
Single lamp ruby	Ruby-LMP3349
Single lamp original	610-292-4848 / LMP39 / ET-SLMP39
Compatible lamp	LMP-K1328
Universal Remote original	Fernb-uni-V3
Remote control original	645 047 7867 / CXJT

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3351>



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W06	1.2-1.5:1	2.4-3 m	+/-40%		Powered
Sanyo LNS-W04	1.54-2.03:1	3.1-4.1 m	+/-40%		Powered
Sanyo LNS-W02Z	1.4-1.8:1	2.8-3.7 m	+/-40%		Powered
Sanyo LNS-T03	6.2-9.1:1	12.6-18.5 m	+/-40%		Powered
Sanyo LNS-S03	2.6-3.5:1	5.3-7.1 m	+/-40%		Powered
Sanyo LNS-S02Z	2-2.6:1	4.1-5.3 m	+/-50%		Powered
Sanyo LNS-M01Z	3.5-4.5:1	7.1-9.1 m	+/-40%		Powered
Sanyo LNS-T02	4.4-6.2:1	8.9-12.6 m	+/-40%		Powered
Fix Optional Lenses					
Sanyo LNS-W03	0.8:1	1.6 m	0.0% Fix		No Zoom
Sanyo LNS-W01Z	1.2:1	2.4 m	+/-40%		No Zoom
Sanyo LNS-T01Z	7:1	14.2 m	+/-40%		No Zoom
Status	2003 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data





HCinema

<https://www.projector-database.com/pro/sanyoplcef31-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.