

Sanyo PLC XM80/L

SANYO PLC XM80/L



The Sanyo model PLC XM80/L is an LCD projector with XGA 1024 x 768 resolution and a contrast of 1000:1. The built-in lens shift and keystone correction function provides freedom when setting up. The projector can illuminate images up to 616 cm wide thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 411 cm is recommended. The model is also Full HD 1080P compatible. The projector was launched in 2011 and is no longer sold by the manufacturer.



3 x 0,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

5000

1000:1 full on/off

5,0000 min. Lumen

Vert.: +/-50% Hori.: +/-10%

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

275W Lamp

Articel Nr.: 610-347-5158 / LMP137

2000 h. 3000 h. in eco Mode

-

Powered

Powered 1,69

F=1,8-2,3 f=26,9-45,4 mm / L optional

1,70-2,89:1


7W Mono

DVI-D in
5 x BNC RGBHC in
D-sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in und out

1667 Lux (bei 200 cm Screen)

1000:1 full on/off

1,672 min. Lumen

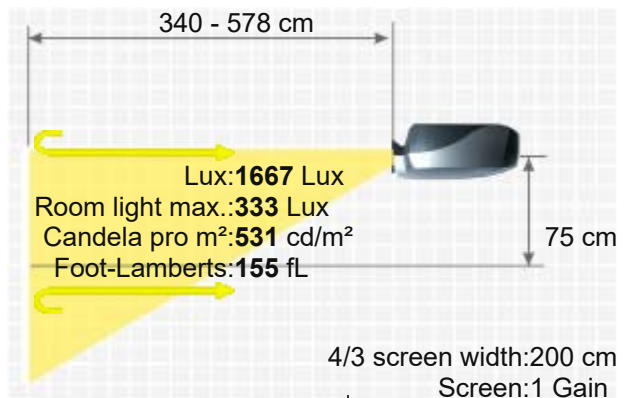

USB
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise


Yes
397W
489,5 x 164 x 434,8 mm (19,3"x6,5"x17,1") 34,81 L/dm³
31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

9,30 kg / 20,5 lbs.
Vert.: +/-40°
Hori.: +/-20°
90%
H-sync: 15-100 kHz
V-sync: 48-100 Hz
Range max.: 140 MHz
155 fL / max. 616 cm screen width
531 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- PJLink™
- Lan network compatible.
-

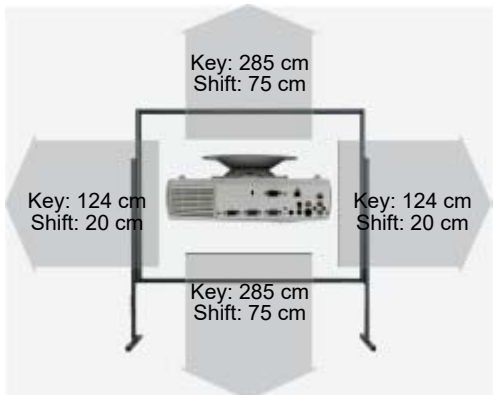

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W20	1.25-1.7:1	2.5-3.4 m	+/-50%	+/-10%	Powered
LNS-T21	4.6-7.36:1	9.2-14.7 m	+/-50%	+/-10%	Powered
LNS-T20	2.89-4.6:1	5.8-9.2 m	+/-50%	+/-10%	Powered
LNS-S20	1.7-2.89:1	3.4-5.8 m	+/-50%	+/-10%	Powered
Fix Optional Lenses					
LNS-W21	0.8:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2011 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/sanyoplcm80-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.