

Sanyo PLC XP46E/L

SANYO PLC XP46E/L



The stationary Sanyo PLC XP46E/L LCD projector has 4100 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. The projector also offers a lens shift function that makes image adjustment child's play. An image width of up to 558 cm is possible as the projector has 4100 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 372 cm. On the market since 2002, the model is no longer offered by the manufacturer Sanyo.



3 x 1,3" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	4100	Screen	1327 Lux (bei 203 cm Screen)
	800:1 full on/off		800:1 full on/off
	5,1250 min. Lumen		1.665 min. Lumen

Vert.: +50% -0%

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N HDTV 1080i, 720p 480p 1035i

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

275W NSH Lamp

Articel Nr.: 610 297 3891

2000 h.

-

Powered

Powered 1,3

F=1,7-2,0 f=48,2-62,6 mm

1,7-2,3:1

2W Stereo

1 x D-Sub15

1 x DVI-D


Audio: 1 x Stereo Mini Jack

Computer 2 5 x BNC (RGB / Video/Y, Pb/Cb, Pr/Cr)

Audio: 1 x Stereo Mini Jack

Video S-Video

1 x RCA x 3 (Video/Y, Pb/Cb, Pr/Cr)

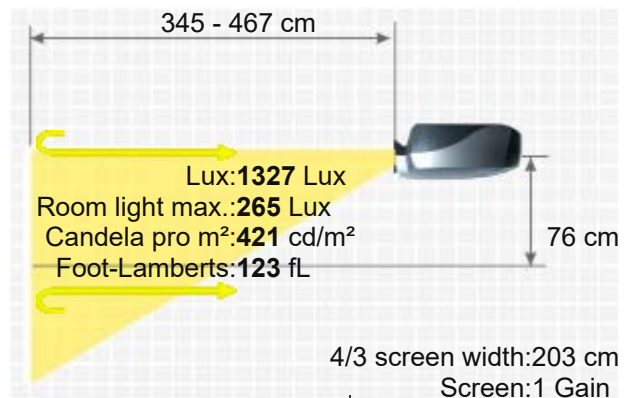

Audio: 1 x RCA x 2 (Stereo)
Steuereingänge 1 x USB (Typ B)
1 x Mini DIN8pin
RS232C
Kabelfernbedienung

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
-
319 x 168 x 430 mm (12,6"x6,6"x16,9") 23,04 L/dm³
35dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,40 kg / 18,52 lbs.
Vert.: +/-40°
Hori.: +/-10°
90%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 160 MHz
123 fL / max. 558 cm screen width
421 cd/m²


Features

- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with laser pointer
- Optional LAN network compatible.
- 49x digital zoom
- New progressive scan system.
- 3D digital noise reduction for video images.
- Adapts to all line voltages.
- RJ45 optionally via Net Work Manager model POA-PN01
- 3D-AUCC
-

Optional

Lamp ruby	Ruby-LMP3424
Lamp original	610-297-3891 / LMP47 / ET-SLMP47
Compatible lamp	LMP-K1357
Universal Remote original	Fernb-uni-V3
Object lens original	ET-SW31A / LNS-W31A
Object lens original	ET-ST32 / LNS-T32
Object lens original	ET-ST31A / LNS-T31A
Remote control original	945 052 0854 / CXLE
Air filter (big) original	POA-FIL-130-g / 910 303 8774
Air filter (small) original	POA-FIL-130-k / 910 303 8781
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d3428>

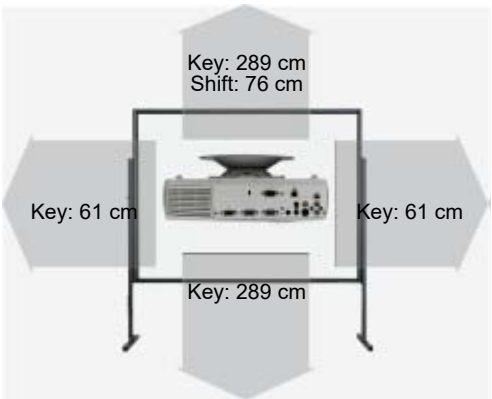

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W31A	1.26-1.81:1	2.6-3.7 m	50%		Powered
Sanyo LNS-T32	4.12-5.56:1	8.4-11.3 m	50%		Powered
Sanyo LNS-T31A	2.31-4.19:1	4.7-8.5 m	50%		Powered
Fix Optional Lenses					
Sanyo LNS-W32	0.81:1	1.6 m	0.0% Fix		No Zoom

Status 2002 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/sanyoplcxp46-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.