

SightMax XP 2800



Brief Introduction

Beta 2.5

A brief introduction to the SightMax XP 2800. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. 2800 Ansi lumens ensure that an image width of 461 cm is also possible. However, if room light is available, the picture should be max. 307 cm wide. The projector is no longer sold by the manufacturer.

Display Type

3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2800

906 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

7,0000 min. Lumen

2.283 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

200W UHL Lamp
2000 h.

Operating Costs

-

Focus

-

Zoom

-

Objective

F=1,7 f=38-49 mm

Throw Ratio

-

Audio

-

Connections

DVI
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power

270W

Size WxHxD

305 x 87 x 240 mm (12"x3,4"x9,4") 6,37 L/dm³

Operating Noise

36dB

Weight

3,70 kg / 8,16 lbs.

Keystone


Vert.: +/-15°

Illumination

90%

Frequenz

H-sync: 15,6-91 kHz
V-sync: 50-85 Hz

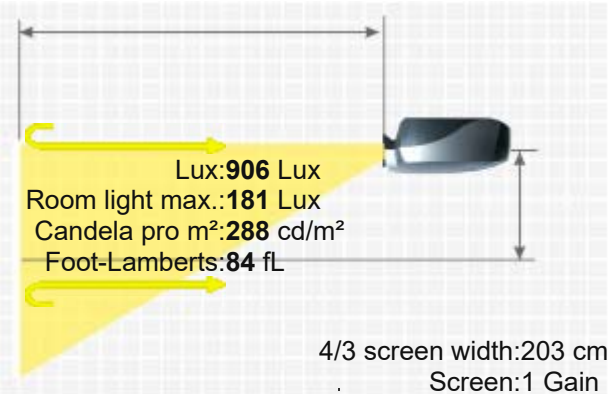

SIGHTMAX XP 2800

Foot-Lamberts	84 fL / max. 461 cm screen width
	288 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/sightmaxxp2800-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.