

Sony VPL FW41/L



The Sony VPL FW41/L LCD projector has 4500 Ansi lumens, a contrast of 700:1 and a WXGA 1280 x 800 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 682 cm is possible as the projector has 4500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 455 cm. Furthermore, the projector can play 1080P without any problems. On the market since 2009, the model is no longer offered by the manufacturer Sony.



3 x 0,75" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 4500 / 3600 im Eco Mode

700:1 full on/off

6,4286 min. Lumen

Vert.: +65% -0% Hori.: +/-10% motorisch

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).

275W Lamp

Articel Nr.: LMP-F270

2000 h. 3000 h. in Eco Mode

-

Powered

Powered 1,3

F=1,66-2,18 f=30,6-39,7 mm

1,875-2,381:1


2 x 1,8W

HDMI in
2 x D-sub 15pin in 1 x out
5 x BNC RGBHV in
S-Video in
Cinch Video in
Mini Jack in
RJ45 in
RS232C Din 9pin in

Screen 1800 Lux (bei 200 cm Screen)

700:1 full on/off

2,581 min. Lumen

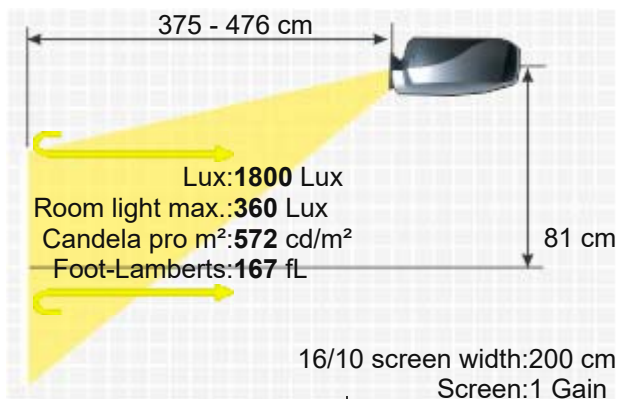



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
400W
532 x 145 x 352 mm (20,9"x5,7"x13,9") 27,15 L/dm³
35 / 28 dB in Eco Mode

Weight
Keystone
Illumination

9,80 kg / 21,61 lbs.
Vert.: +/-30°
-

Frequenz

H-sync: 19-92 kHz
V-sync: 48-92 Hz

Foot-Lamberts

167 fL / max. 682 cm screen width
572 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- De-interlacer mir 3:2 2:2 pull down.

Optional

- | | |
|-------------------------|---------------------|
| Bulb only | NLMP16581 |
| Lamp ruby | Ruby-LMP16581 |
| Lamp original | LMP-F270 |
| Compatible lamp | LMP-K16580 |
| Object lens original | VPLL-Z1014 |
| Object lens original | VPLL-1008 |
| Remote control original | 148010412 / RM-PJ18 |
| Ceiling Mount 100-120 | Halterung100 |

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19521>

Optional Lenses

