


Sony VPL S900U/E



Display Type	3 x 1,3" LCD TFT Panels mit Metallmaske SVGA 4/3 Liquid Crystal Display	
Ansi-Lumen	Projector 1100	Screen 356 Lux (bei 203 cm Screen)
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed	
Video Modes	PAL, SECAM, NTSC, NTSC4.43, PAL-M	
Application	Standard-Portabel External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source	120W UHP Lamp Articel Nr.: LMP-600	
Light Life	2000 h.	
Operating Costs	-	
Focus	-	
Zoom	-	
Objective	-	
Throw Ratio	-	
Audio	3 Speaker System	
Connections	S-Video in Cinch Video in Cinch Stereo in 2 x Mini Jack in 1 x out D-sub 15pin in und out Maus in	
Ceiling Mounting	-	
Power	220W 2W standby	
Size WxHxD	333 x 120 x 291 mm (13,1"x4,7"x11,5") 11,63 L/dm³	
Operating Noise	-	
Weight	5,90 kg / 11,02 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 15-91 kHz V-sync: 43-85 Hz	
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²	
Features	■ Remote control with laser pointer und mouse control ■ VPL-S900U: UL1950 and cUL1950 listed, FCC Class-A, IC Class-A, DHHS (Laser)	

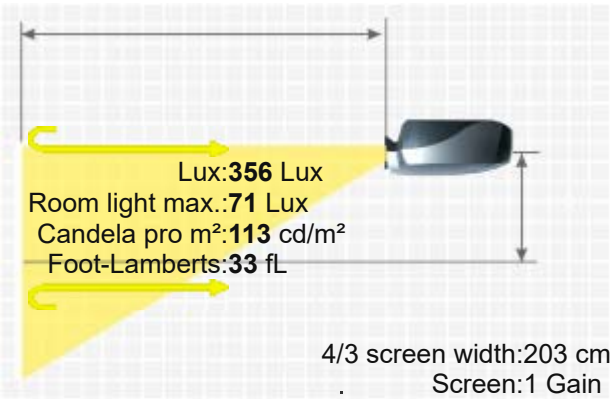

SONY VPL S900U/E

More Details



HCinema

<https://www.projector-database.com/pro/sonyvpls900u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.